

UGS-C 防腐型彩色石英玻璃液位计

UGS-C ANTI-CORROSIVE COLOR QUARTZ GLASS LIQUID LEVEL GAUGE

适用范围 SUITABLE RANGE

UGS-C 防腐型彩色石英玻璃液位计适用于盐酸等酸性、碱性液体和许多有机溶剂（尤其是活性族溶剂）。但不适用于浓缩硝酸、铬酸混合物、含氯溶剂、脂肪族、芳香氢等介质液体的测量。

UGS-C anti-corrosive color quartz glass liquid level gauges are suitable for acidic, alkaline liquids and organic solutions especially active solutions such as hydrochloric acid etc. But on the other hand, it cannot be used for concentrated nitric acid, chrome acid mixture, chloric solution, aliphatic solution and balmy hydrogen etc..

主要技术参数 SPECIFICATIONS

工作压力 operating pressure : 0.6MPa

工作温度 operating temperature : -20~80℃

测量范围 measuring range L :

(两法兰间中心距CL) 300、500、800、1100、1400、1700、2000mm。

显示范围 indicating range :

测量范围 measuring range L-200mm

过程连接 process connection :

DN25(或DN20、DN40)凸面(或平面), 法兰标准HG20592~20635-97, 其它法兰标准请用户注明。

Convex flange as above, other on request.

接液材质 contacting material :

PP, PTFE,

99.99%SiO₂石英管 quartz tube

液位计配套 attachment : 带截止阀 with drain valve

可选项 options :

蒸汽加热夹套 with steam heating jacket :

工作压力 operating pressure 1.0MPa,


接口尺寸 joint G1/2" 外螺纹 outer thread

循环水加热夹套 with cycling water heating jacket :


工作压力 operating pressure 1.0MPa,

接口尺寸 joint G3/4" 外螺纹 outer thread

电伴热 with electrical heating equipment

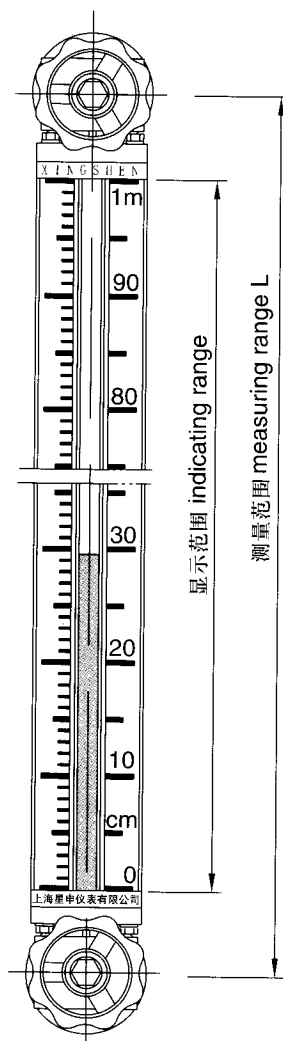

UGS-C 型

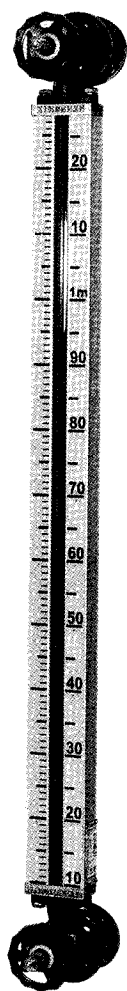

订货须知 order information

型号 model ;

工作压力 operating pressure ;

工作温度 operating temperature ;

测量范围 measuring range ;

过程连接 process connection