


UGS-H 三色石英玻璃管液位(界位)计

UGS-H THREE-COLOR QUARTZ GLASS LIQUID LEVEL (INTERFACE) GAUGE

适用范围 SUITABLE RANGE

UGS-H三色石英玻璃液位(界位)计适用于两种液体介质的界位测量, 如液化气和油、油品和水等。UGS-H液位计不仅可以显示界位, 同时气相显示红色液位显示绿色。

UGS-H three-color quartz glass interface gauge is suitable for interface measurement of two liquids such as liquefied gas/water or oil/water etc. The float indicates interface, and gas is red and liquid is green, which indicates liquid level.

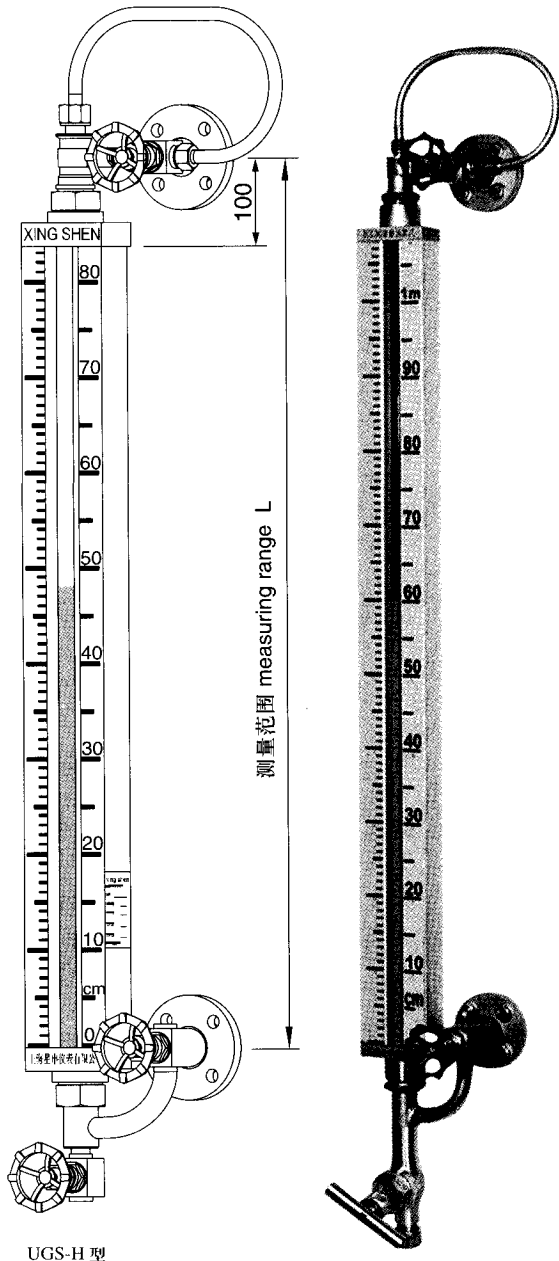

UGS-H 型

主要技术参数 SPECIFICATIONS

工作压力 operating pressure:

1.6, 2.5, 4.0, 6.4, 10.0MPa

工作温度 operating temperature: $\leq 450^{\circ}\text{C}$

测量范围 measuring range L;

(两法兰间中心距CL) 300、500、800、1100、1400、1700、2000mm。

显示范围 indicating range:

测量范围 measuring range L-200mm

介质密度差 differential specific gravity: $\geq 0.05 \text{ g/cm}^3$

过程连接 process connection:

DN25 或 DN20 凸面 (或平面), 法兰标准 HG20592~20635-97, 其它法兰标准请用户注明。Convex flange as above, other on request.

接液材质 contacting material: 碳钢 carbon steel,

不锈钢 1Cr18Ni9Ti, 304SS, 316L

99.99%SiO₂ 石英管 quartz tube.

液位计配套 attachment:

两法兰引出管阀门带安全装置, 带排污阀 safety unit in valve and with drain valve.

钢珠自动封闭压力 steel ball automatically sealing pressure: $\geq 0.2\text{MPa}$

可选项 options:

蒸汽加热夹套 with steam heating jacket:

工作压力 operating pressure 1.0MPa,

接口尺寸 joint G1/2" 外螺纹 outer thread

循环水加热夹套 with cycling water heating jacket:

工作压力 operating pressure 1.0MPa,

接口尺寸 joint G3/4" 外螺纹 outer thread

电伴热 with electrical heating equipment

订货须知 order information

型号 model;

工作压力 operating pressure;

工作温度 operating temperature;

测量范围 measuring range;

两种介质的密度 specific gravity of two medium;

材质 material;

过程连接 process connection