



UB 型玻璃板液位计

UB GLASS PLATE LIQUID LEVEL GAUGE

概述 INTRODUCTION

UB型玻璃板液位计可直接用来指示各种容器内介质的液位高度。

UB-A型玻璃板液位计是UB型的改进型，它具有不堵塞、不渗漏，安装维护方便等优点。

UB glass plate liquid level gauges indicate liquid level directly in all kinds of tanks.

UB-A glass plate liquid level gauges are improved on UB type. It take advantages free of blockage, no-leak and ease to installation and maintain.

主要技术参数

MAIN TECHNICAL PARAMETERS

安装中心距 center-center distance: L=300, 500, 800, 1100, 1400, 1700mm

工作压力 operating pressure: 4.0MPa 工作温度 operating temperature: $\leq 180^{\circ}\text{C}$

阀门自动封闭压力 valve automatically sealing pressure: $>0.2\text{MPa}$


蒸汽伴热夹套压力 heating jacket pressure: 0.6MPa

蒸汽夹套接头 heating jacket coupling: G1/2" 外螺纹

材质 material: 碳钢 carbon steel, 不锈钢 stainless steel


UB型连接螺纹 connecting screw: 外螺纹 G3/4" 或 M27 \times 1.5 outer thread

UB-A型连接法兰标准 connecting flange: JB/T82.2-94 DN20 PN4.0凸面, 其它法兰标准如HGJ、GB、ANSI等请用户注明。Convex flange, other standards on request.

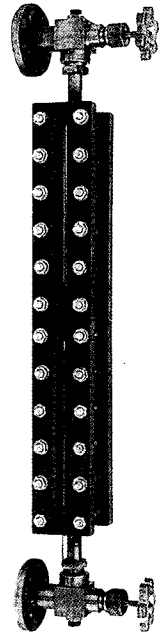

型号规格和用途 MODEL, SPEC AND PURPOSE

UB		玻璃板液位计 glass plate liquid level gauge												
	1	透光式 Transparent, 一般用于无色透明的液体, 光线较好的场合。						基本类型 basic type						
	2	透光式带蒸汽夹套 Transparent with heating jacket, 用于粘稠、易冻的液体的介质。												
	3	反射式 Reflective, 一般用于稍有色泽的液体, 且光线较好场合。												
	4	反射式带蒸汽夹套 Reflective with heating jacket, 用于粘稠、易冻的液体的介质。												
	5	防霜式, 用于低温场合。Frost-proof type for hypothermia liquids												
	6	照明式, 用于光线较差的场合。Illuminating type for dim light condition												
	A	改进型, 法兰连接 improved type, flange connection						安装形式 mounting mode						
		1	碳钢 carbon steel			2	不锈钢 stainless steel	材质 material						
		1	300mm	2	500mm	3	800mm	4	1100mm	5	1400mm	6	1700mm	测量范围 measuring range

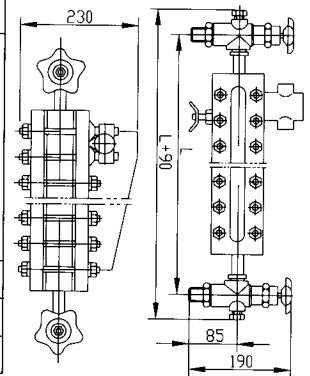

订货须知 ORDER INFORMATION: 型号规格 model and spec; 测量范围、工作压力、工作温度 measuring range, operating pressure and temperature; 安装方式、材质要求 connecting mode and material request 是否配套供应容器上法兰、螺栓、螺母、密封垫圈等配件。Accessories such as vessel flanges, bolts, nuts and sealing gaskets.

UB-6

