

UHF 系列防腐蚀玻璃板液位计



UHF SERIES CORROSION PROOF GLASS PLATE LIQUID LEVEL GAUGE

概述 INTRODUCTION

UHF系列防腐蚀玻璃板液位计是一种新型耐腐蚀的仪表，仪表能按腐蚀性介质的不同性能采用不同的防腐蚀材料。液位计指示清晰，它具有结构简单，维修方便，安全、可靠等特点，广泛用于石油、化工、天然气等工业领域的强腐蚀性介质的液位测量。

UHF series corrosion proof glass plate level gauge is a new type corrosion proof instrument. Various corrosion proof materials are available accommodating to different performance medium. Liquid level is indicated clearly. Simple in structure, easy in maintain, secure and reliable, the gauges are applied to measure liquid level of strong corrosive medium in the field of petroleum, chemical engineering and natural gas.

外形尺寸 DIMENSION

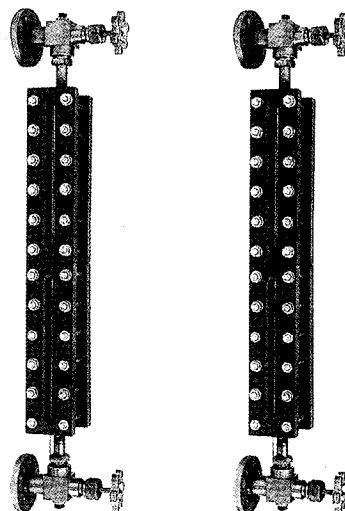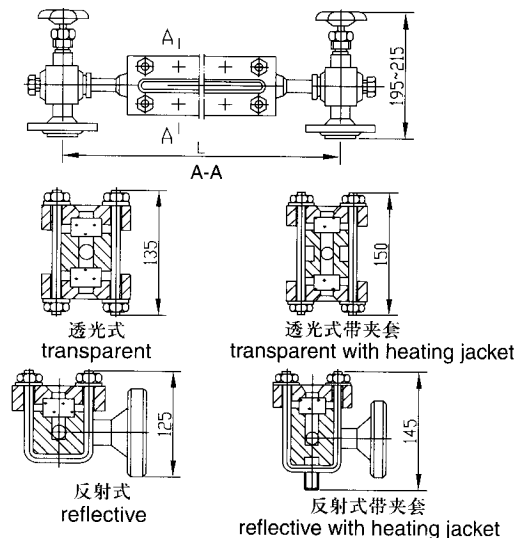

主要技术参数

MAIN TECHNICAL PARAMETERS

测量范围 measuring range: (安装中心距center-center distance L mm)300,500,800,1100,1400,1700

工作压力 operating pressure: 4.0; 6.3 MPa

工作温度 operating temperature: ≤180℃

蒸汽伴热夹套压力 heating jacket pressure: 0.6 MPa

蒸汽夹套接头 heating jacket coupling: G1/2" 外螺纹连接法兰标准 connecting flange standard:

JB/T82.2-94 DN20 PN4.0或PN 6.3凸面, 其它法兰标准等请用户注明。convex flange, other flange upon request.

材质 material: 碳钢carbon steel, 不锈钢stainless steel

型号规格 MODEL AND SPEC

UHF	系列防腐蚀玻璃板液位计 corrosion proof glass plate liquid level gauge		
	1	透光式 Transparent, 一般用于无色透明的液体, 且光线较好场所。	基本类型 basic type
	2	透光式带蒸汽夹套 Transparent with heating jacket, 用于粘稠、易冻的液体介质。	
	3	反射式 Reflective, 一般用于有色泽的液体, 且光线较好场所。	
	4	反射式带蒸汽夹套 Reflective with heating jacket, 用于粘稠、易冻的液体介质。	
	1	碳钢 (耐热碳钢) carbon steel (temperature resistant carbon steel)	材质 material
	2	不锈钢 stainless steel	
	1	300mm	测量范围 measuring rang
	2	500mm	
	3	800mm	
	4	1100mm	
	5	1400mm	
	6	1700mm	
	-	4.0	工作压力 operating pressure: 4.0 MPa
	-	6.3	工作压力 operating pressure: 6.3 MPa