

# UHZ-517C10/C10A 型磁翻柱液位计

## UHZ-517C10/C10A MAGNETIC LIQUID LEVEL GAUGE

### 适用范围 SUITABLE RANGE

UHZ-517C10是最常用的侧装式磁翻柱液位计, 适用于工作压力低于2.5MPa, 工作温度低于200℃的液体介质的液位测量。

UHZ-517C10 is side-mounted magnetic reversing column liquid level gauge in most common use. It is suitable to measure the level of liquid medium which operating pressure less than 2.5 MPa and operating temperature less than 200 °C.

### 技术参数 SPECIFICATION

测量范围 measuring range :

两个法兰中心之间的距离 center-center distance  
最小 min. 150mm 至最大 max. 8000mm

工作压力 operating pressure : 2.5MPa

工作温度 operating temperature :

UHZ-517C10 型: -20~100 °C

UHZ-517C10A 型: -20~200 °C

介质密度 medium density : 0.5~2.0 g/cm<sup>3</sup>

过程连接 process connecting :

旁路侧面安装法兰 side mounting flange :

DN25, PN1.0 或 PN1.6、PN2.5,


法兰标准 flange standard : HG20592~20635-97 其它

法兰标准请用户注明 Other standard on request.

材质 material : 旁路管 bypass tube : 1Cr18Ni9Ti; 316L

浮子 float : 钛 titanium

可选项 optional item :

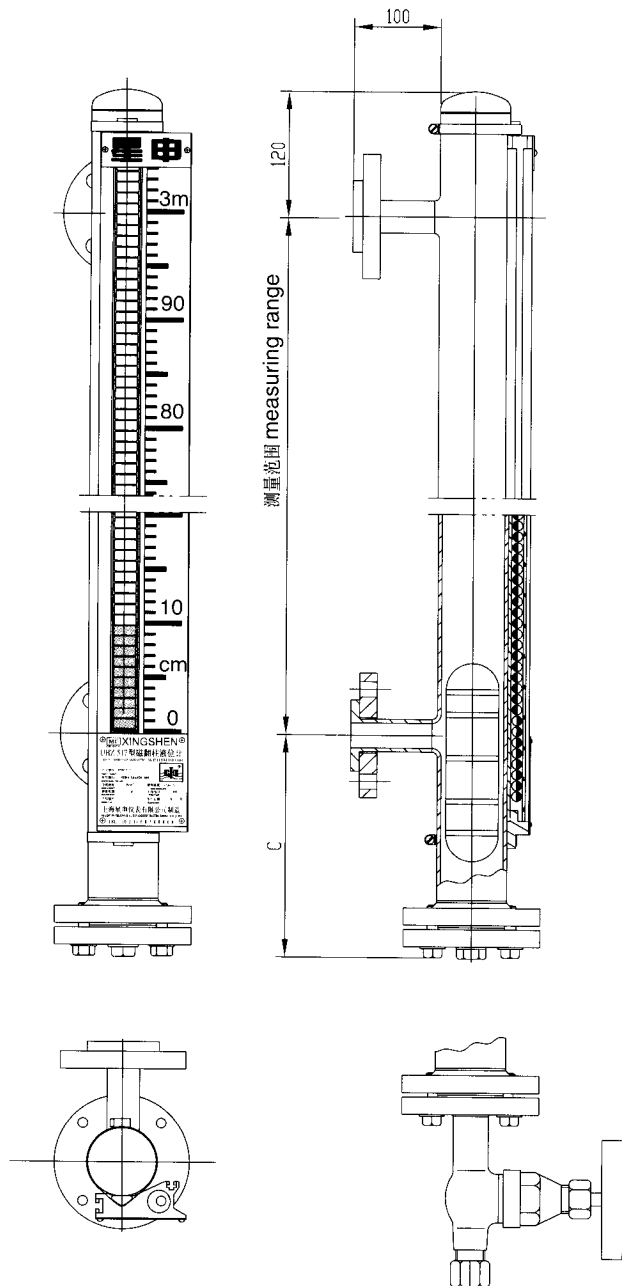

UHZ-517C10(A)	
<input type="checkbox"/> L	排污阀 with drain valve
<input type="checkbox"/>	液位开关 with level switch, G、M、N、S、T 任选 option
<input type="checkbox"/> R	4~20mA 二线制变送器 with two-wire transmitter
<input type="checkbox"/> D	隔爆型 explosion proof type: dIIBT4
<input type="checkbox"/> E	本安型 intrinsically safe type: ibIICT4
<input type="checkbox"/> F	配隔离安全栅 matched with isolating barrier
<input type="checkbox"/> A	XGTH-510(竖式) 显示调节报警仪 with display and regulating instrument (upright)
<input type="checkbox"/> B	XGTA-810(横式) 显示调节报警仪 with display and regulating instrument (horizontal)
<input type="checkbox"/> J1	蒸汽加热夹套 with steam heating jacket
<input type="checkbox"/> J2	循环水加热夹套 with cycling water heating jacket
<input type="checkbox"/> J3	真空夹套 with vacuum jacket
<input type="checkbox"/> J4	电伴热装置 electrical heating equipment
<input type="checkbox"/>	测量范围 measruing range (mm)
<input type="checkbox"/>	介质密度 specific gravity of medium (g/cm <sup>3</sup> )
<input type="checkbox"/>	工作压力 operating pressure (MPa)