


[外形尺寸] Outline Demension

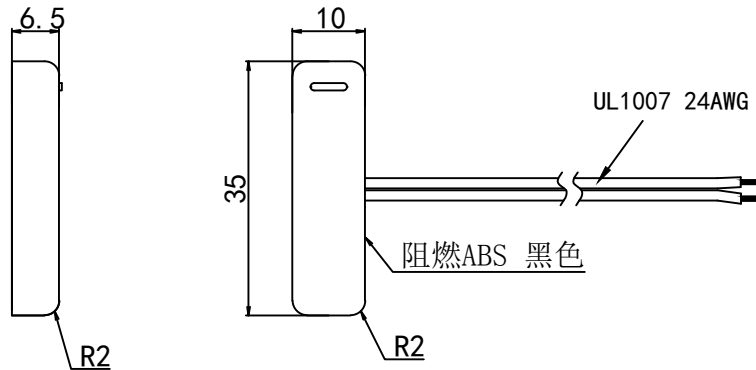

开关参数 Switch Characteristic

1. 干簧管型号 Switching Specifaction	1: (Normally open)	2: (Normally open High voltage)	3: (change over)	4: (Normally open)	5: (Normally open)
	Form A	Form A (HV)	Form C	Form A	Form A
2. 最大接点容量 Max Contact Rating	10W	10W	5W	50W/70VA	100VA
3. 最大开关电压 Max Switch Voltage	DC200V	AC265V/DC200V	DC175V	AC300V/DC350V	DC1000V
4. 最小击穿电压 Min Breakdown Voltage	DC250V	DC400V	DC400V	DC600V	DC4000V
5. 最大开关电流 Max Switch Current	0.5A	AC0.3A/DC0.4A	0.25A	AC0.5A/DC0.7A	1.0A
6. 最大负载电流 Max Carry Current	1.0A	1.4A	1.5A	2.5A	2.5A

性能参数 Physical Characteristic

1. 耐冲击性 Min Shock:	30G
2. 耐振动性 Min Vibration:	30G (10~50Hz)
3. 使用温度范围 Temp. Rating:	-30~80°C
4. 热冲击性 Heat Shock:	-40~85°C

订购信息 Order Information

系列 Series	触点形式 Contact Form	开关参数 Switch Characteristic	磁性特征 (灵敏度) Magneticial Specifaction (Sensitivity)	电线长度 (毫米) Cable Length (mm)	剥皮浸锡 Termination
MS19-	XX	X	X	X	W
选项 OPTIONS	1A: 1Form A 1B: 1Form B 1C: 1Form C	1: 10W 2: 10W (HV) 3: 5W 4: 50W 5: 100VA	1: 10AT-15AT 2: 15AT-20AT 3: 20AT-25AT 4: 25AT-30AT	1: 100mm 2: 300mm 3: 500mm	W: 5mm of wire stripped and tinned

备注 Remark:  <b>RoHS</b>	设计 Designed by	zhangxiaojing	品名 TITLE	接近开关 Proximity Switch	
	审查 Checked by	Xu Deng Kui	产品型号 P/N		
	批准 Approved by	Xu Tao	MS19	版本 Version: V1.0	
	日期 Date	2013.05.29		页次 Page: 1/1	