


SFE 过滤消音器

| | |
|-------------|---|
| 描述 | Duray过滤消音器接口G1/4-G2, 最大流量3330L/M, SFE过滤消音器同时具备了过滤功能和消音功能, 用于处理气动设备排放的废气, 可去除含油气体中对环境不利的油滴, 可降低排放噪音。 |
| 残油含量 | < 0.01 mg/m ³ |
| 过滤效率 | > 99.99% |
| 消音效率 | > 40 dB (A) (1 m) |
| 使用寿命 | 约2500工作小时, 取决于受污染程度 |
| 排放 | 盛杯可通过使用溢流阀清空, 也可人工打开后倾倒油污 |
| 操作压力 | max. 16 bar |
| 工作温度 | 2 °C-100 °C |
| 材质 | 外壳: G1/4和G3/8 聚丙烯塑料, G1/2-G2 铝合金 滤芯: 微玻璃纤维和聚氨酯 |

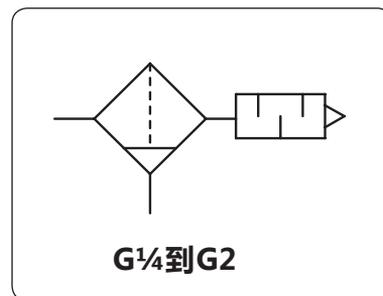

| 尺寸 | | | | 流量 | | 接口 | 型号 |
|----|---|----|-----|---------------------------------|---------------------|----|----|
| A | B | ØC | A/F | m ³ /h ^{*1} | l/min nd | G | |






| 过滤消音器 | | | | 最大操作压力 16 bar | | SFE | |
|-------|-----|-----|----|---------------|------|--------|---------------|
| 8 | 131 | 77 | 28 | 30 | 500 | G1/4 | SFE-02 |
| 8 | 131 | 77 | 28 | 35 | 580 | G3/8 | SFE-03 |
| 12 | 181 | 90 | 36 | 75 | 1250 | G1/2 | SFE-04 |
| 12 | 181 | 90 | 36 | 100 | 1670 | G3/4 | SFE-06 |
| 15 | 254 | 110 | 50 | 175 | 2920 | G1 | SFE-08 |
| 70 | 287 | 110 | 50 | 200 | 3330 | G1 1/4 | SFE-10 |
| 70 | 312 | 110 | 50 | 200 | 3330 | G1 1/2 | SFE-12 |
| 70 | 312 | 110 | 50 | 200 | 3330 | G2 | SFE-16 |



配件

| | | | |
|-------------|----|--------------|----------------|
| 安装支架 | 碳钢 | 用于 G1/4到G3/4 | BW00-20 |
| | | 用于 G1到G2 | BW00-21 |

过滤器

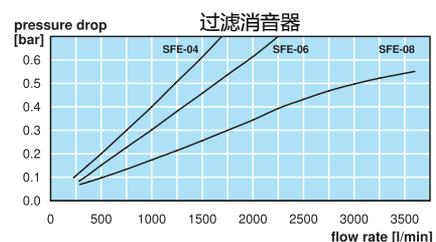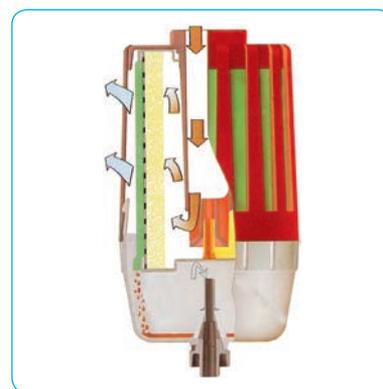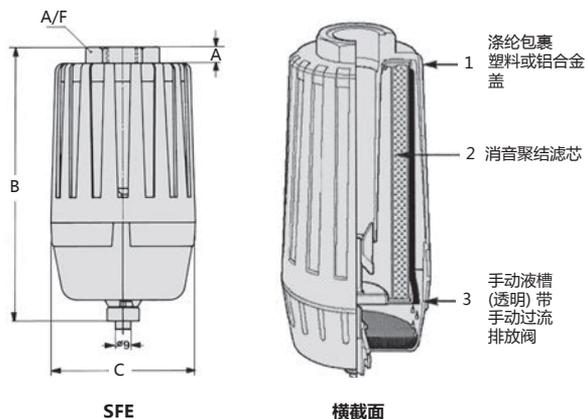

*1 在入口压力为6bar, 出口排空的情况下



Order example:
SFE-02
www.duray-control.cn