

PCB LAYOUT


SPECIFICATIONS

Material:

Insulator: Glass filled PBT (UL94V-0), Black
 Contacts: Brass
 Contact Plating: Au or Sn over 50 u' Ni
 Plating: 1u" Au

Electrical Characteristics:

Contact Resistance: 20mΩ Max.
 Insulator Resistance: 1000MΩ Min.
 Withstanding Voltage: AC 1000V
 Currernt Rating: 3 AMP
 Operating Temperature: -40°C to +105°C

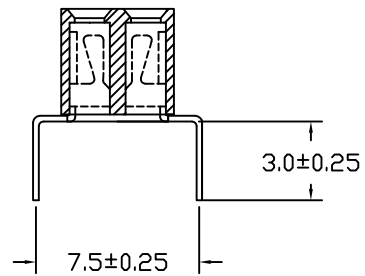

未注公差按公差分段要求

Position Dimension	2 thru 40
A± 0.30	2.54 * No. of Positions+0.4
B± 0.25	2.54 * No. of Contacts-2.54

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-05-06	深圳市百富特电子 有限公司	
主体	PBT					
端子	黄铜镀金	制图	审查	核准	品名	2.54(H5.0)2*NP 蜈蚣脚排母
公差分段	>10 ±0.30 <10 ±0.20 <3 ±0.10					
视角		刘建			料号	