

PCB LAYOUT


## SPECIFICATIONS

### Material:

Insulator: Glass filled PBT (UL94V-0), Black  
 Contacts: Brass  
 Contact Plating: Au or Sn over 50 u' Ni  
 Plating: 1u" Au

### Electrical Characteristics:

Contact Resistance: 20mΩ Max.  
 Insulator Resistance: 1000MΩ Min.  
 Withstanding Voltage: AC 1000V  
 Currernt Rating: 3 AMP  
 Operating Temperature: -40°C to +105°C

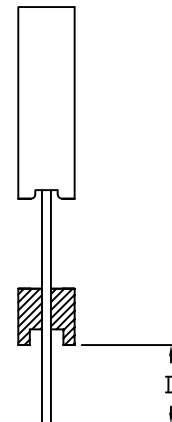

Position Dimension	2 thru 40				
A±0.30	2.54 * No. of Positions+0.4				
B±0.25	2.54 * No. of Contacts-2.54				
H	5.0	5.7	6.8	7.1	8.5
W	2.6	2.4	3.5	2.4	2.4

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-05-15	深圳市百富特电子 有限公司	
主体	PBT				品名	料号
端子	黄铜镀金					
公差 分段	>10 ±0.30 <10 ±0.25 <3 ±0.10	制图	审查	核准	品名	2.54X8.5 排母加胶芯 1*NP 180°
视角		刘建			料号	