





SPECIFICATIONS

Material:

Insulator: Glass filled PBT (UL94V-0), Black
 Contacts: Brass
 Contact Plating: Au or Sn over 50 u' Ni
 Plating: 1u" Au

Electrical Characteristics:

Contact Resistance: 20mΩ Max.
 Insulator Resistance: 1000MΩ Min.
 Withstanding Voltage: AC 1000V
 Currernt Rating: 3 AMP
 Operating Temperature: -40°C to +105°C

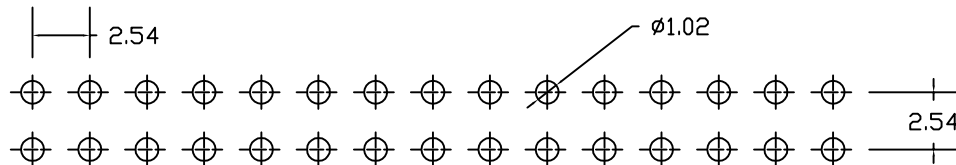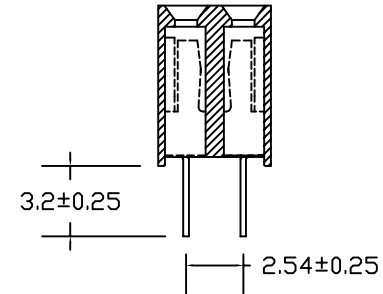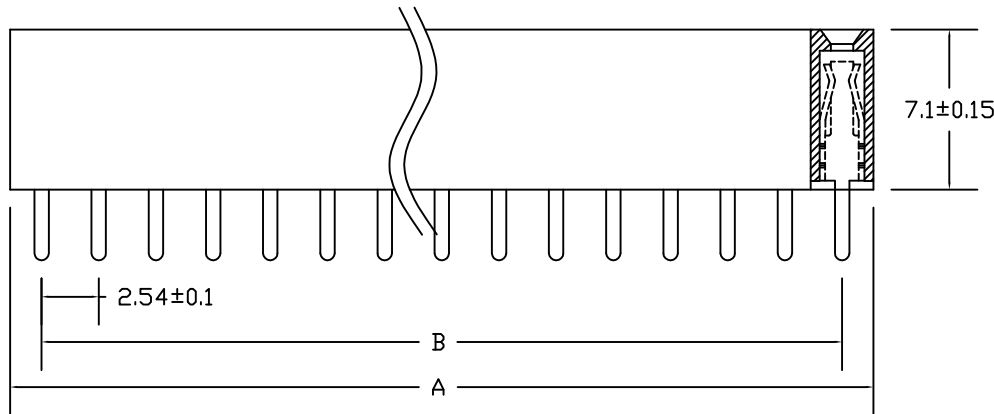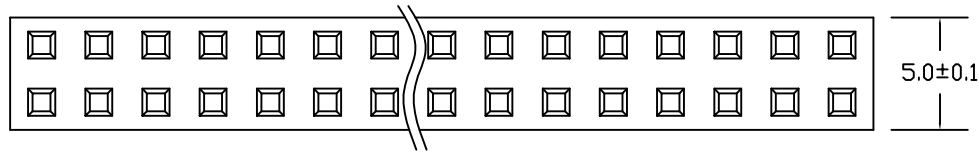

PCB LAYOUT

| | |
|--------------------|------------------------------|
| Position Dimension | 2 thru 40 |
| A± 0.30 | 2.54 * No. of Positions+0.40 |
| B± 0.25 | 2.54 * No. of Contacts-2.54 |

未注公差按公差分段要求

| | | | | | | |
|--------------|------------------------------------|----------|-------------|------------------|------------------|---------------------------|
| MATERIAL(材质) | | 单位 MM | 比例 按图纸缩放 | 日期 2012-05-11 | 深圳市百富特电子 有限公司 | |
| 主体 | PBT | | | | | |
| 端子 | 黄铜镀金 | 制图 | 审查 | 核准 | 品名 | 2.54(H7.1)2*NP 180° 排母 |
| 公差分段 | >10 ±0.30 <10 ±0.25 <3 ±0.10 | | | | | |
| 视角 | | | | | | |