





**Material:**

Insulator Material :Polyeser (UL94V-0)  
Standard: PA6T ,BK

Contacts: Brass  
Contact Plating:Au or Sn over 50u'' Ni  
Plating:Gold Flash

**Electrical Charactistics:**

Contact Resistance:20mΩ Max.  
Insulator Resistance:1000MΩ Min.  
Withstanding Voltage:AC 500V  
Currnt Rating:1.5 AMP  
Operating Temperature:-40°C to +105°C

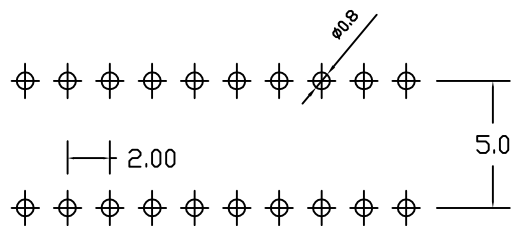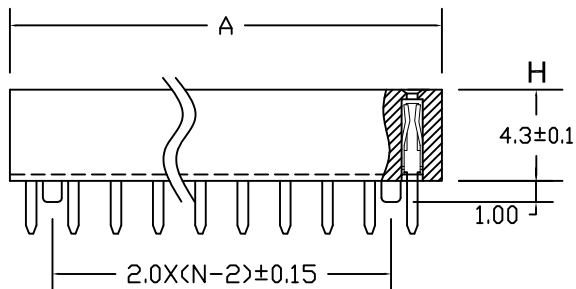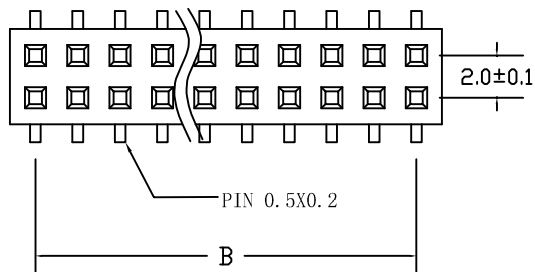

PCB LAYOUT

W	4.0/4.5
H	4.0/4.3/4.6
D	5.0/6.0

Position Dimension	2 Thru 40
A± 0.30	2.00 * No. of Positions+0.40
B± 0.20	2.00 * No. of Contacts-2.00

立柱可有可无

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-6-08	深圳市百富特电子 有限公司	
主体	PA6T					
端子	黄铜镀金	制图	审查	核准	品名	2.0*4.3 排母 2*NP 蜈蚣脚
公差分段	>10 ±0.3 <10 ±0.2 <3 ±0.1					
视角		刘建			料号	