
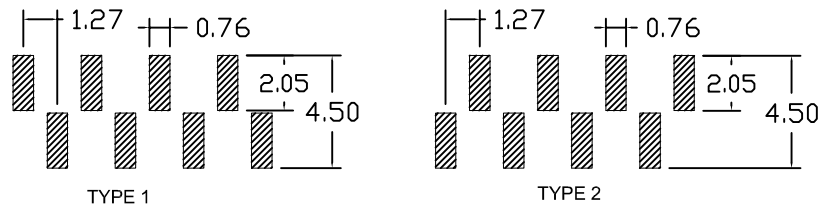

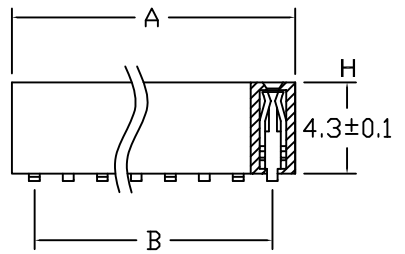


SPECIFICATIONS

Material:
 Insulator: Glass filled PA6T (UL94V-0), Black
 Contacts: Brass
 Plating: Au or Sn over 50u'' Ni
Electrical Characteristics:
 Contact Resistance: 20mΩ Max.
 Insulator Resistance: 1000MΩ Min.
 Withstanding Voltage: AC 500V
 Currernt Rating: 3 AMP
 Operating Temperature: -40°C to +105°C

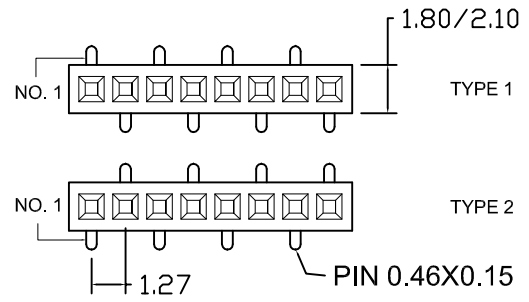

Position Dimension	1 Thru 50
A± 0.20	1.27 * No. of Positions+0.40
B± 0.15	1.27 * No. of Contacts-1.27
H	2.0/3.4/4.3

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-07-04	深圳市百富特电子 有限公司	
主体	PA6T					
端子	黄铜镀锡	制图	审查	核准	品名	1.27排母 1*NP
公差分段	>10 ±0.20 <10 ±0.15 <3 ±0.10					90度弯贴
视角						刘建