

SPECIFICATIONS

Material:

Insulator: Glass filled PA6T (UL94V-0), Black

Contacts: Brass

Plating: Au or Sn over 50u'' Ni

Electrical Characteristics:




Contact Resistance: 20mΩ Max.

Insulator Resistance: 1000MΩ Min.

Withstanding Voltage: AC 500V

Current Rating: 1 AMP

Operating Temperature: -40°C to +105°C

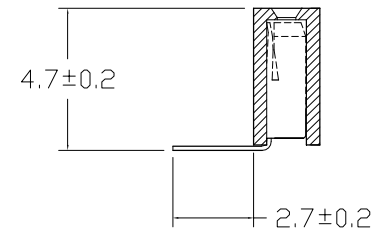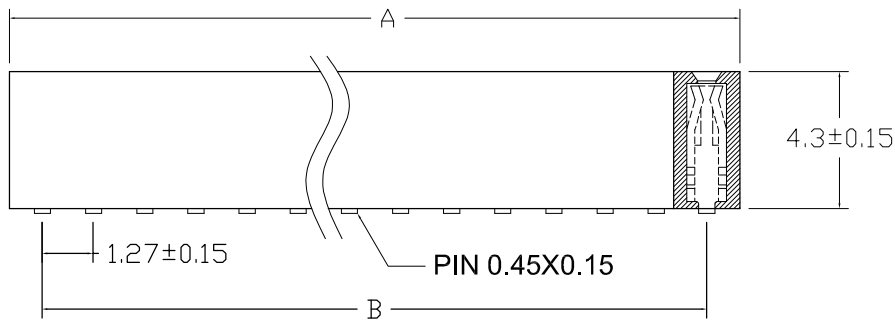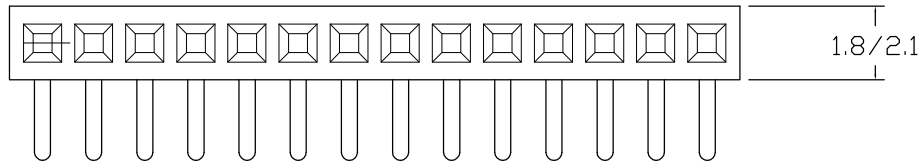

PCB LAYOUT

未注公差按公差分段要求

Position Dimension	1 Thru 50
A± 0.30	1.27 * No. of Positions+0.4
B± 0.20	1.27 * No. of Contacts-1.27

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-06-20	深圳市百富特 电子有限公司	
主体	PA6T				制图	审查
端子	黄铜镀金	1.27*4.3双排母座 90度 2*NP				
公差 分段	>10 ±0.30 <10 ±0.20 <3 ±0.10	刘建			料号	
视角						