

# SPECIFICATIONS

Material:

Insulator: Glass filled PA6T (UL94V-0), Black

Contacts: Brass

Plating: 1u" Au

**Electrical Characteristics:**





Contact Resistance: 20mΩ Max.

Insulator Resistance: 500MΩ Min.

Withstanding Voltage: AC 500V

Current Rating: 1 AMP

Operating Temperature: -40°C to +105°C

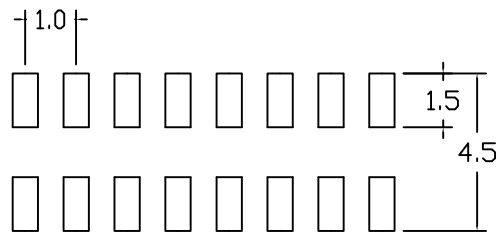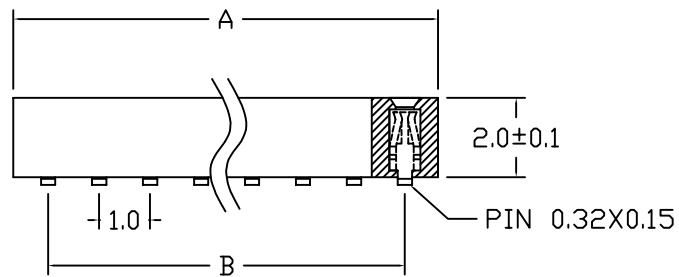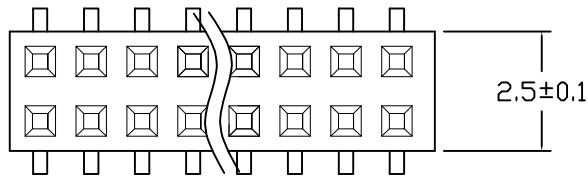

PCB LAYOUT

未注公差按公差分段要求

Position Dimension	1 Thru 40
A± 0.20	1.0 * No. of Positions+0.4
B± 0.20	1.0 * No. of Contacts-1.0

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-06-20	深圳市百富特 电子有限公司	
主体	PA6T				制图	审查
端子	黄铜镀金	料号				
公差	>10 ±0.30					
分段	10 ±0.20 3 ±0.10					
视角		刘建				