

# SPECIFICATIONS

Material:

Insulator: Glass filled PBT (UL94V-0), Black

Contacts: Brass

Plating: Au or Sn over 50u'' Ni

**Electrical Characteristics:**





Contact Resistance: 20mΩ Max.

Insulator Resistance: 1000MΩ Min.

Withstanding Voltage: AC 500V

Current Rating: 2 AMP

Operating Temperature: -40°C to +105°C

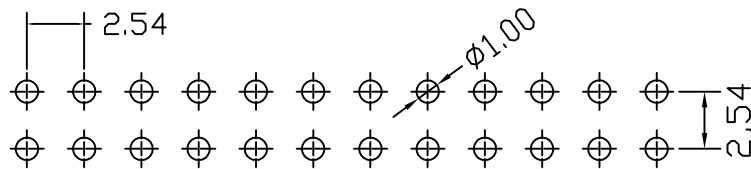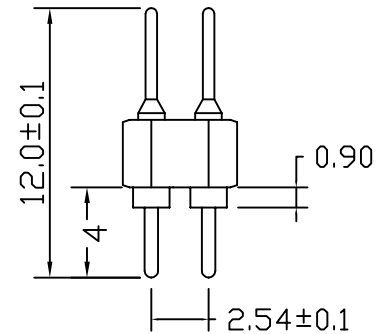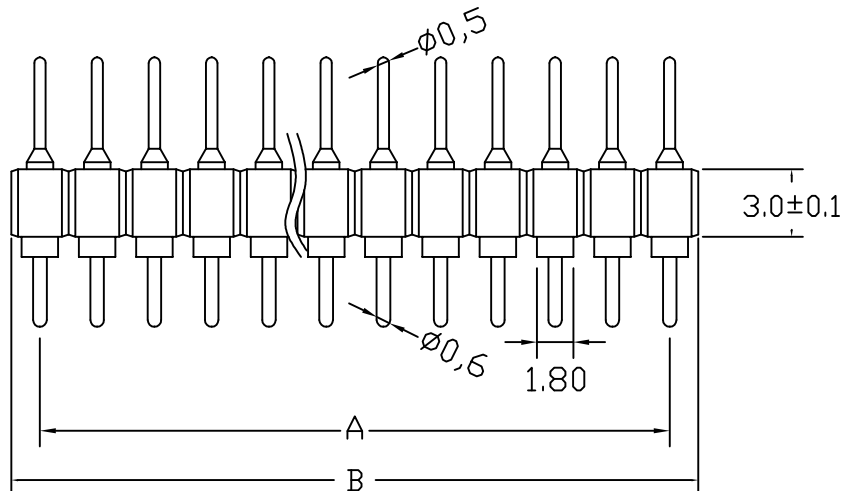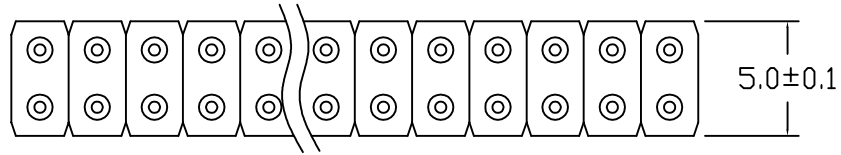

PCB LAYOUT

Position Dimension	1 Thru 40
A ± 0.30	2.54 * No. of Positions
B ± 0.20	2.54 * No. of Contacts-2.54

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-06-20	深圳市百富特电子有限公司	
主体	PBT					
端子	黄铜镀金	制图	审查	核准	品名	2.54 双头针系列
公差分段	>10 ±0.3 <10 ±0.2 <3 ±0.1					
视角						