

SPECIFICATIONS

Material:

Insulator: Glass filled PA6T (UL94V-0), Black

Contacts: Brass

Plating: Au or Sn over 50u'' Ni

Electrical Characteristics:





Contact Resistance: 20mΩ Max.

Insulator Resistance: 1000MΩ Min.

Withstanding Voltage: AC 500V

Current Rating: 1 AMP

Operating Temperature: -40°C to +105°C

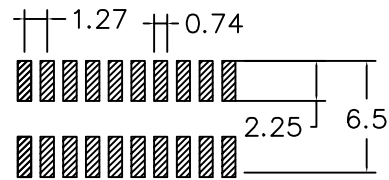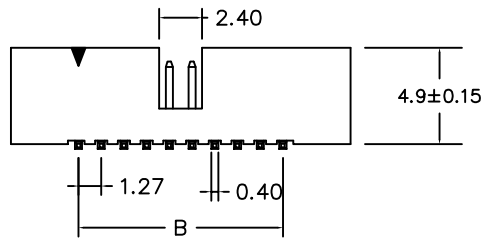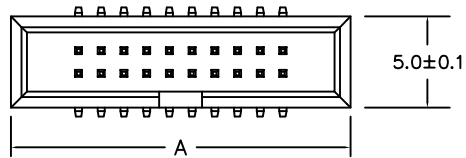

PCB LAYOUT

未注公差按公差分段要求

Position Dimension	6 Thru 60
A±0.30	1.27 * No. of Positions+6.35
B±0.20	1.27 * No. of Contacts-1.27

MATERIAL(材质)		单位	比例	日期	深圳市百富特电子有限公司	
主体	PA6T	MM	按图纸缩放	2013-06-14		
端子	黄铜镀金					
公差分段	>10 ±0.30 <10 ±0.20 <3 ±0.10	制图	审查	核准	品名	1.27X4.9筒牛 6P-NP
视角		刘建			料号	