

8 7 6 5 4 3 2 1

### SPECIFICATIONS

**Material:**


Insulator Material :Polyeser(UL94V-0)  
Standard: PA6T ,BK

Contacts: Brass  
Contact Plating: Au or Sn over 50u'' Ni  
Plating: Gold Flash

**Electrical Characteristics:**

Contact Resistance: 20mΩ Max.  
Insulator Resistance: 1000MΩ Min.  
Withstanding Voltage: AC 1000V  
Currernt Rating: 3 AMP  
Operating Temperature: -40°C to +105°C



D

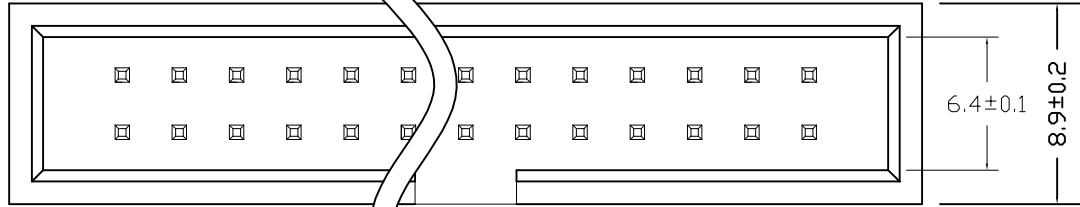

C

B

A

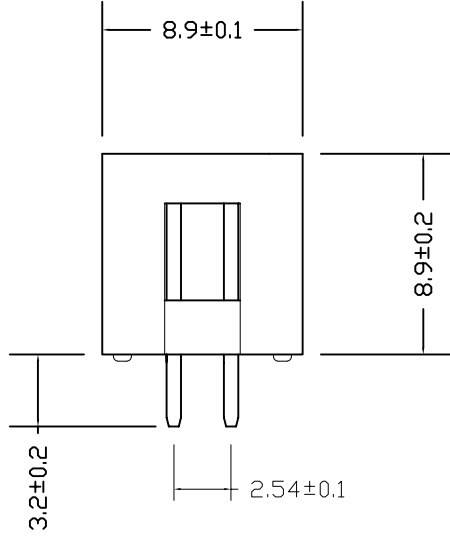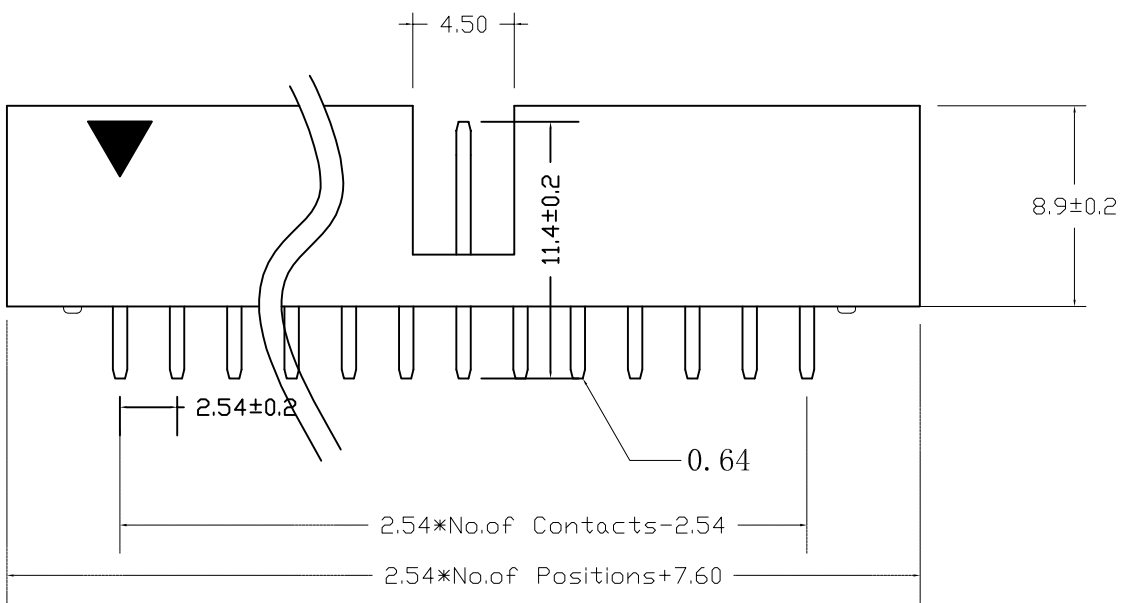

MATERIAL(材质)		单位 MM	比例 按图纸比例	日期 2013-06-14	深圳市百富特电子有限公司	
主体	PA6T					
端子	黄铜镀金	制图	审查	核准	品名	2.54 BOX 6-nP
公差 分段	>10 ±0.3 <10 ±0.2 <3 ±0.1					
视角						

8 7 6 5 4 3 2 1