

SPECIFICATIONS

Material:

Insulator: Glass filled PBT (UL94V-0), Gray
Contacts: Brass

Contact Plating: Gold or Sn over 50 u'' Ni
Plating: 0.6u'' Au

Electrical Characteristics:

Contact Resistance: 20mΩ Max.






Insulator Resistance: 1000MΩ Min.

Withstanding Voltage: AC 500V

Current Rating: 3 AMP

Operating Temperature: -40°C to +105°C

| no. of Contacts | A | B |
|-----------------|--------|-------|
| 6P | 26.82 | 5.08 |
| 8P | 29.36 | 7.62 |
| 10P | 31.9 | 10.16 |
| 12P | 34.44 | 12.70 |
| 14P | 36.98 | 15.24 |
| 16P | 39.52 | 17.78 |
| 18P | 42.06 | 20.32 |
| 20P | 44.60 | 22.86 |
| 24P | 49.68 | 27.94 |
| 26P | 52.22 | 30.48 |
| 30P | 57.30 | 35.56 |
| 34P | 62.38 | 40.64 |
| 40P | 70.00 | 48.26 |
| 50P | 82.70 | 60.96 |
| 60P | 95.40 | 73.66 |
| 64P | 100.48 | 78.74 |

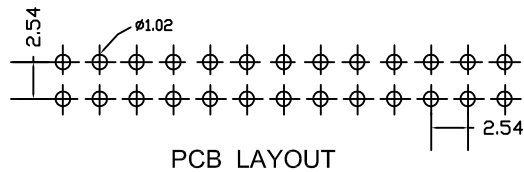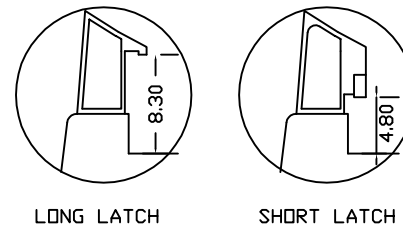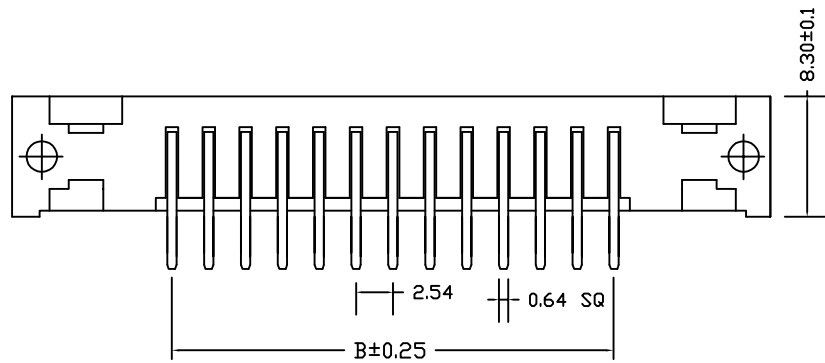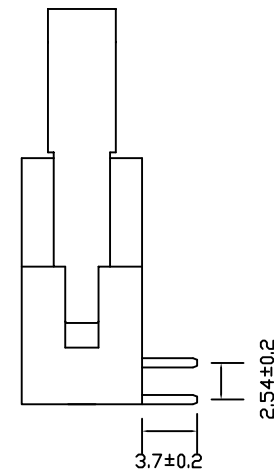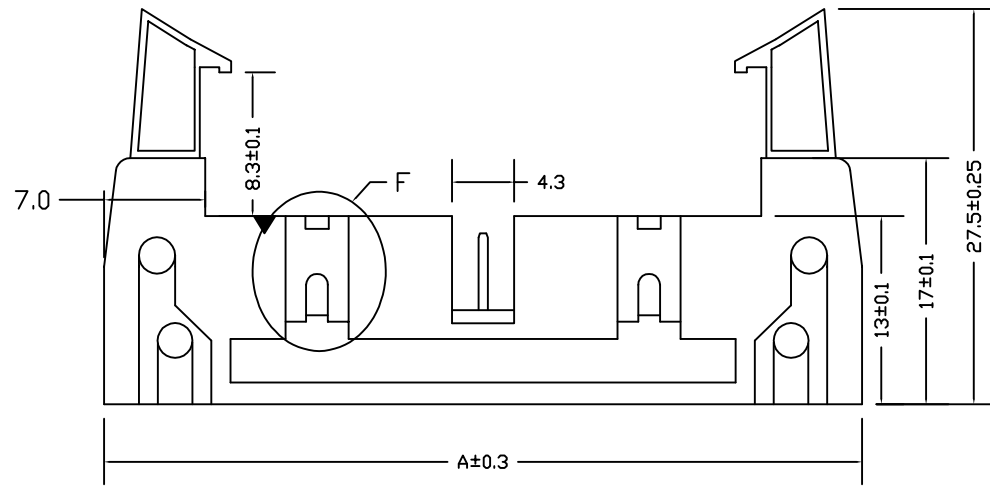

未注公差按公差分段要求

| MATERIAL(材质) | | 单位 MM | 比例 按图纸缩放 | 日期 2013-05-24 | 深圳市百富特电子 有限公司 | | |
|--------------|------------------------------------|----------|-------------|------------------|------------------|----|----|
| 主体 | PBT | | | | 制图 | 审查 | 核准 |
| 端子 | 黄铜镀金 | 料号 | | | | | |
| 公差分段 | >10 ±0.30 <10 ±0.20 <3 ±0.10 | 视角 | | | | | |
| 视角 | | 刘建 | | | | | |

"F"在18P及18P以上才有