


# UHZ-517C12C 型磁翻柱液位计

## UHZ-517C12C MAGNETIC LIQUID LEVEL GAUGE

### 适用范围 SUITABLE RANGE

UHZ-517C12C型磁翻柱液位计适用于高温高压场合的液位测量, 最高工作温度为420℃, 最大工作压力为10.0MPa。

UHZ-517C12C magnetic reversing column liquid level gauge is suitable for liquid level measurement in high temperature and high pressure situation. Its highest operating temperature is 420℃, and its maximum operating pressure is 10.0 MPa.

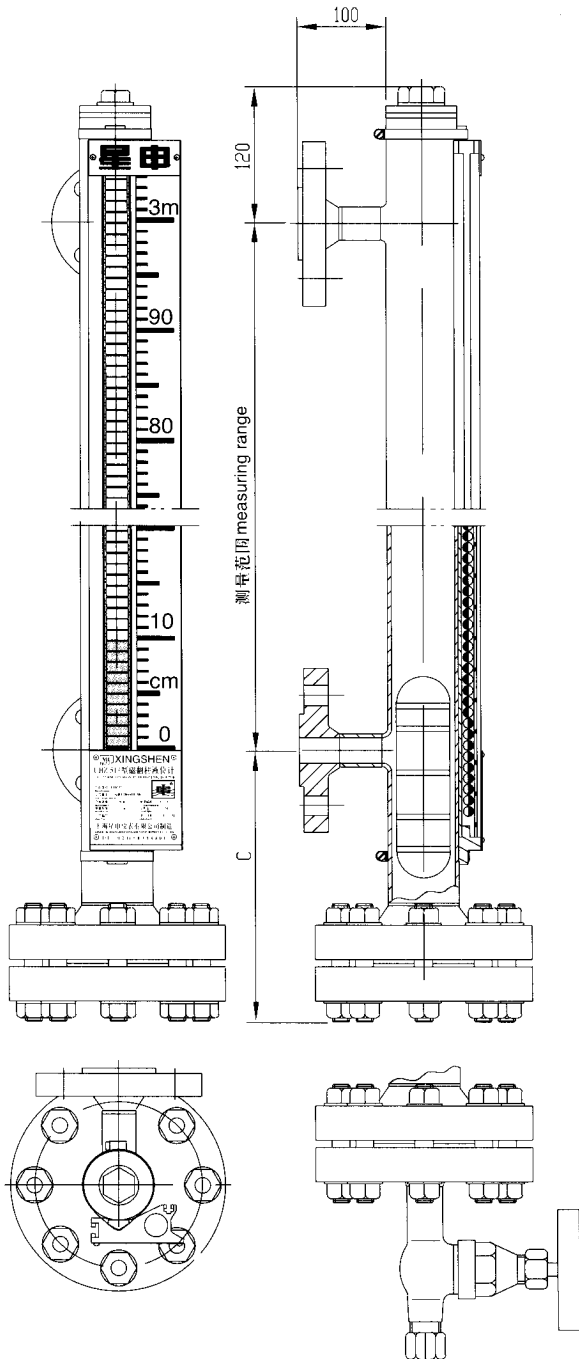

### 技术参数 SPECIFICATION

测量范围 measuring range:

两个法兰中心之间的距离 center-center distance  
最小 min. 150mm 至最大 max. 8000mm

工作压力 operating pressure: 10.0MPa

工作温度 operating temperature:  $\leq 420^{\circ}\text{C}$

介质密度 medium density:  $0.45\sim 2.0\text{g/cm}^3$

过程连接 process connecting:

旁路侧面安装法兰 side mounting convex flange:  
DN25, PN10.0凸面,

法兰标准 flange standard: HG20592~20635-97 其它  
法兰标准请用用户注明 Other standard on request.

材质 material:

旁路管 bypass tube: 00Cr17Ni14M2(316L)

浮子 float: 钛 titanium

翻柱 reversing column: 陶瓷 ceramic

可选项 optional item:

UHZ-517C12C	
<input type="checkbox"/> L	排污阀 with drain valve
<input type="checkbox"/>	液位开关 with level switch, G、M、N、S、T 任选 option
<input type="checkbox"/> R	4~20mA 二线制变送器 with two-wire transmitter
<input type="checkbox"/> D	隔爆型 explosion proof type: dIIBT4
<input type="checkbox"/> E	本安型 intrinsically safe type: ibIICT4
<input type="checkbox"/> F	配隔离安全栅 matched with isolating barrier
<input type="checkbox"/> A	XGTH-510(竖式)显示调节报警仪 with display and regulating instrument(upright)
<input type="checkbox"/> B	XGTA-810(横式)显示调节报警仪 with display and regulating instrument(horizontal)
<input type="checkbox"/> J3	真空夹套 with vacuum jacket
<input type="checkbox"/>	测量范围 measruing range(mm)
<input type="checkbox"/>	介质密度 specific gravity of medium( $\text{g/cm}^3$ )
<input type="checkbox"/>	工作压力 operating pressure (MPa)