




## PRODUCT DATA SHEET

Dry Moly Lube, 11 Wt Oz  
Part Number: 03084

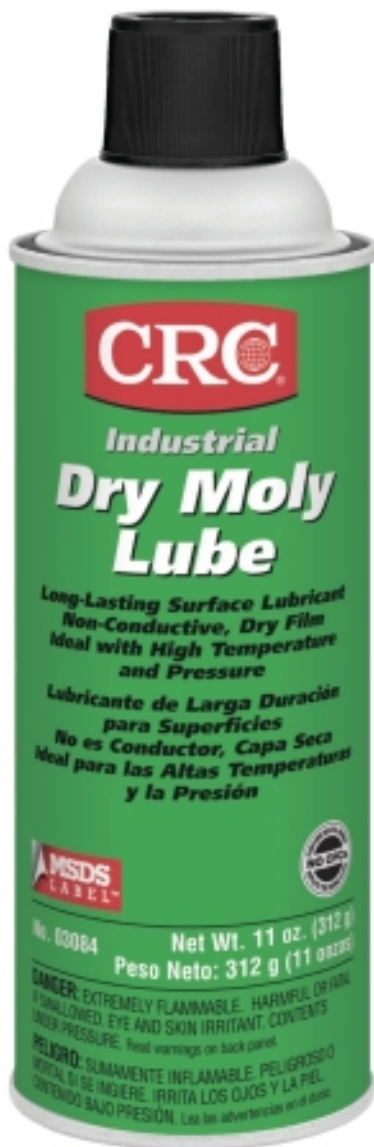

### Product Description

Lowers friction, prevents galling and helps to reduce torque and energy consumption. High anti-friction and anti-seizure properties. Fast drying film resists dirt and dust build-up.

### Applications

Gaskets, transfer belts, conveyor belts, motors, plant machinery and handling equipment, rubber moldings, high temperature, low load, or high rpm slides, rollers, wheels, gears, chains & hoists

### Unit Package Description

16 Ounce Aerosol

### Brand

CRC

### Generic Description 1

Dry Film Lubricant

### Net Fill

11 Wt Oz

### UPC Code

078254030845

### Unit Dimensions

7.75H x 2.63W x 2.63D in

### Units Per Case

12

### Case Dimensions

8.69H x 8.44W x 11.31D in

### Cases Per Pallet

133

### Case Weight

12 lbs

### I 2 of 5 Code

30078254030846

### Appearance

Dark Gray Viscous Liquid

### Base Type

Molybdenum Disulfide

### Flash point (F)

<0°F

### Flash point (C)

<-18°C

### Flammability Class - CPSC

Extremely Flammable

### Spec Gravity Concentrate

0.71

### Plastic Safe

No

### Film Type

Dry

### Evaporation Rate

Fast

### Working Temp (F)

650°F (Continuous) / 750°F (Intermittent)

### Working Temp (C)

343.3°C (Continuous) 398.9°C (Intermittent)

Last revised: 3/28/2016  
Page 1 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
www.crcindustries.com


CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



## PRODUCT DATA SHEET

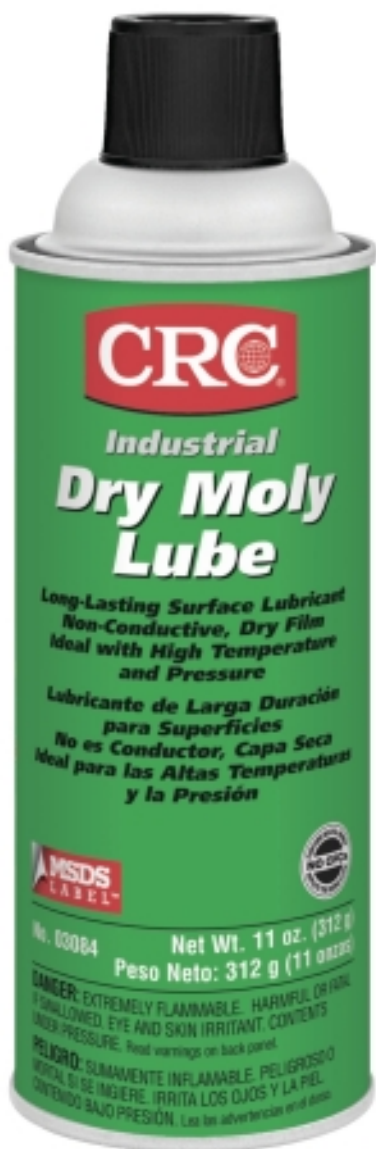

Propellant	Hydrocarbon
Aerosol Flammability Level	III
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
VOC % (Federal)	61.8
VOC g/L (Federal)	438.78
VOC Lbs./Gal. (Federal)	3.66
VOC Category	Dry Lubricant
Removal (How To)	Remove with a heavy duty degreaser.

Last revised: 3/28/2016  
Page 2 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.