咨询: 4006-0Z2-002

17372005357 长沙



Contactors

S134 Series

Emergency disconnect switches Single pole ON/OFF

Catalogue B124.en



深圳 18926488741 微信

SCHALTBAU

17372005357 长沙

S134 Series emergency disconnect switches Single-pole ON/OFF

Schaltbau S132 Series manual disconnect switches are capable of opening a power circuit quickly and effectively.

Installation of these switches enhances safety at the work place significantly (meeting requirements for accident prevention).

S132 Series switches are intended for use with DC applications. Magnetic blowouts allow for higher breaking capacity. As a consequence the polarity of the terminals must be strictly observed when connecting these switches.

Load circuits are closed by pulling the red mushroom knob and ruptered by pushing it down. The positive opening operation guarantees that the contacts

open in the event of an emergency. Thanks to its snap mechanism the switch once actuated will complete the switch off procedure in any case, because the snap mechanism works independent of the actuator. For ON and OFF there are two maintained positions.

Optional is a lockable version complete with cylinder lock. The disconnect switch may be locked when engaged to the OFF position so as to prevent unauthorized use - with key removable only in OFF position.

Features

- Snap action with one NC contact block
- Magnetic blowouts
- Two bistable maintained positions for ON and OFF
- Auxiliary contact available

Applications

Schaltbau emergency disconnect switches are designed for use with battery-powered vehicles such as:

- fork lift trucks
- reach trucks
- pedestrian stacker trucks
- other warehouse machines

Ordering code

	Beispiel: S134-1-ZO-F	T T T
eries S134-1 ersion _	S134 single pole	Main terminals screw-type M8 screw-type M10 M10
Z0 Z1 Z2	no lock cylinder lockable version complete with lock plate and lock cylinder 51	Housing sizes standard short housing L2
H00 H01	ts, number and type no auxiliary contact version for aux. contact assembly HK-S134-L1	Accessories
H11 H21 H31	aux. contact assembly S840 aux. contact assembly S826 aux. contact assembly S870 W1D1 t	 Aux. contact assembly S826 Lock cylinder 51 Lock plate

Note:

This catalogue shows only stock items. For some variants minimum quantities apply. Please ask for the conditions.

Special variant: If you need a special variant of the switch, please do not hesitate to contact us. Maybe the type of switch you are looking for is among our many special designs. If not, we can also supply customized designs. In this case minimum quantities apply...



 Retrofitting only possible with version for auxiliary contact assembly, e.g. S134-1-Z0-H01-M8-L1.

** Retrofitting only possible with lockable version, e.g. S134-1-Z1-H00-M8-L1. With it, you can order lock cylinder 51 (ZHS 4A251) and lock plate (ZP-S13x) as accessories at any time later.

深圳 18926488741 微信


4006-022-002

17372005357

SCHALTBAU

长沙


Circuit diagram



Specifications

S134-1 Series			
Conventional thermal current Ith	250 A		
Inrush current	1,500 A		
Rated operating current Ie	24 V DC, L/R=15 ms, 300 A 80 V DC, L/R=15 ms, 250 A		
Maximum breaking capacity	24 V DC, L/R=15 ms, 1,200 A 80 V DC, L/R=15 ms, 1,000 A		
Rated insulation voltage U _i	160 V		
Rated impulse withstand voltage U_{imp}	4 kV at PD3		
Mechanical endurance	30,000 operating cycles		
Degree of protection (IEC 60529)	IP00		
Mounting position	any		
Main terminals	Bolts for M10 screws		
Auxiliary contact, snap-action switch	S840 r, SPDT, I _{th} = 6 A S826, SPDT, I _{th} = 10 A S870, SPDT, I _{th} = 10 A		
	🛞 SCHALTBAU		

Dimension diagrams

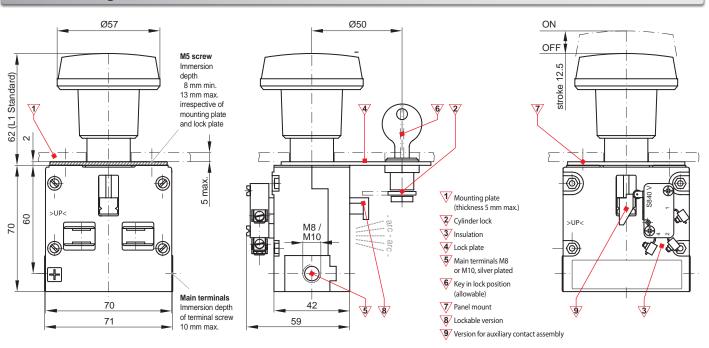

Accessories, Mounting

Lock plate with lock cylinder 51



 \triangle Note:

Retrofitting only possible with lockable version, e.g. S134-1-**Z1**-H00-M8-L1, refer to ordering code.

上海 18924626834

Aux. contact assembly HK-S134-L1






Note:

Retrofitting only possible with version for auxiliary contact assembly, e.g. S134-1-Z0-H01-M8-L1, refer to ordering code.


Cutout

深圳



Tightening torque:: • Main terminals (5): M8 / M10: 12 Nm max. Panel mounting (7): M5: 3 Nm max.



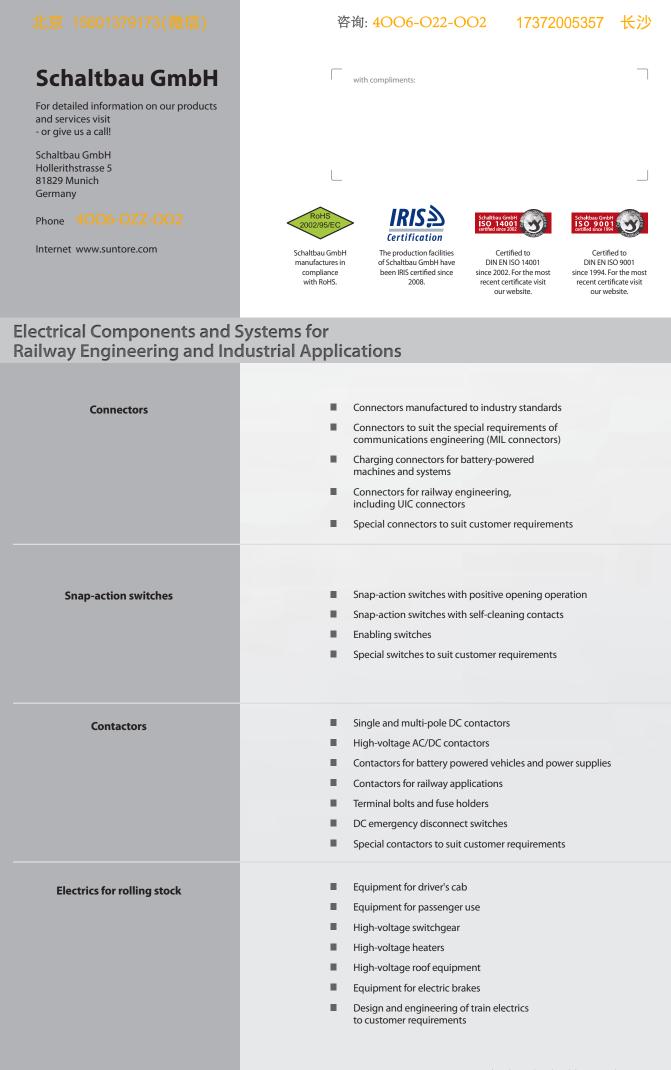

上海 B1884/1204/0.0



We reserve the right to make technical alterations without prior notice. 深圳 18926488741 微信