
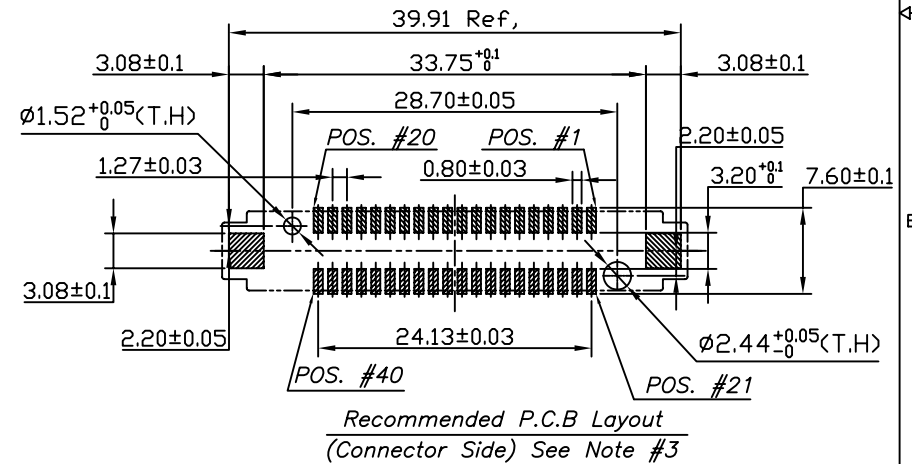
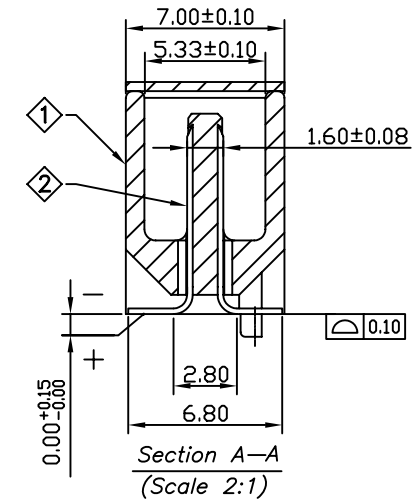

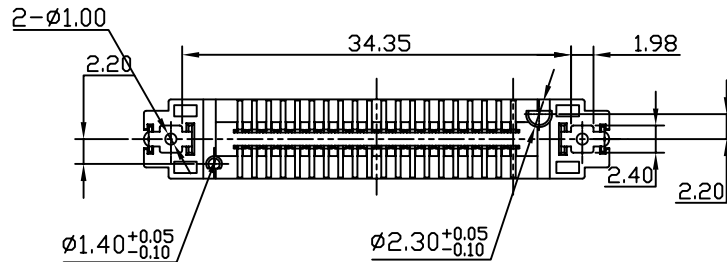
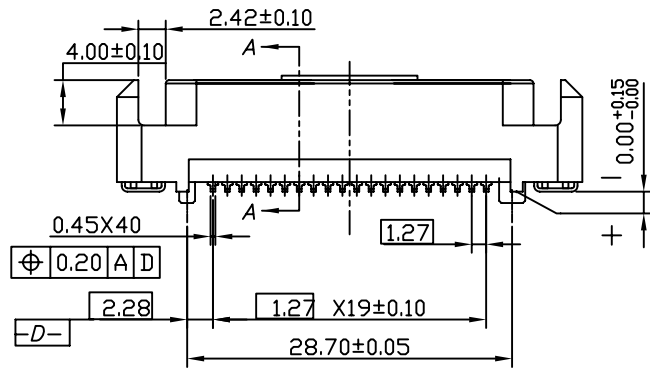


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent; it that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

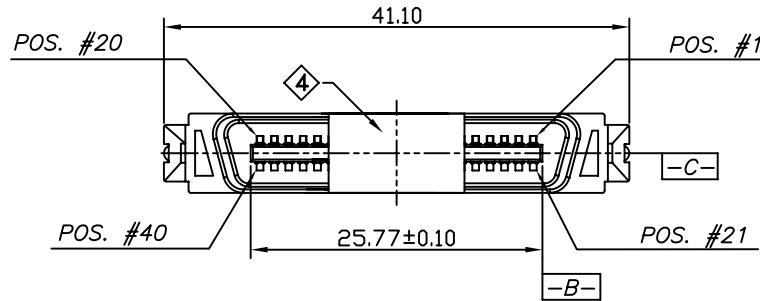


UNLESS OTHERWISE SPECIFIED TOLERANCES			APPROVAL		DATE		Amphenol		
U.S. METRIC			DRAWN	B H	4/06/09				
			CHECKED	Y H	4/06/09				
.X	+/-	0.50	TITLE SCA-2 PLUG CONNECTOR 40 WAYS SMT						
.XX	+/-	0.25							
.XXX	+/-	0.20							
FRACTIONS	+/-								
ANGLES	+/-	5°	DRAWING FILE : \\DRAWING\SCA\C SCA40110013-2.dwg						
FOR MATERIALS AND FINISHES SEE NOTES			ANGLE OF PROJECTION						
REMOVE SHARP EDGES									
DIMENSIONS									
U.S. — INCHES —									
(METRIC) (MM)									
			SCALE		NONE		SHEET 1 OF 2		

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent; it that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
See Sheet1				

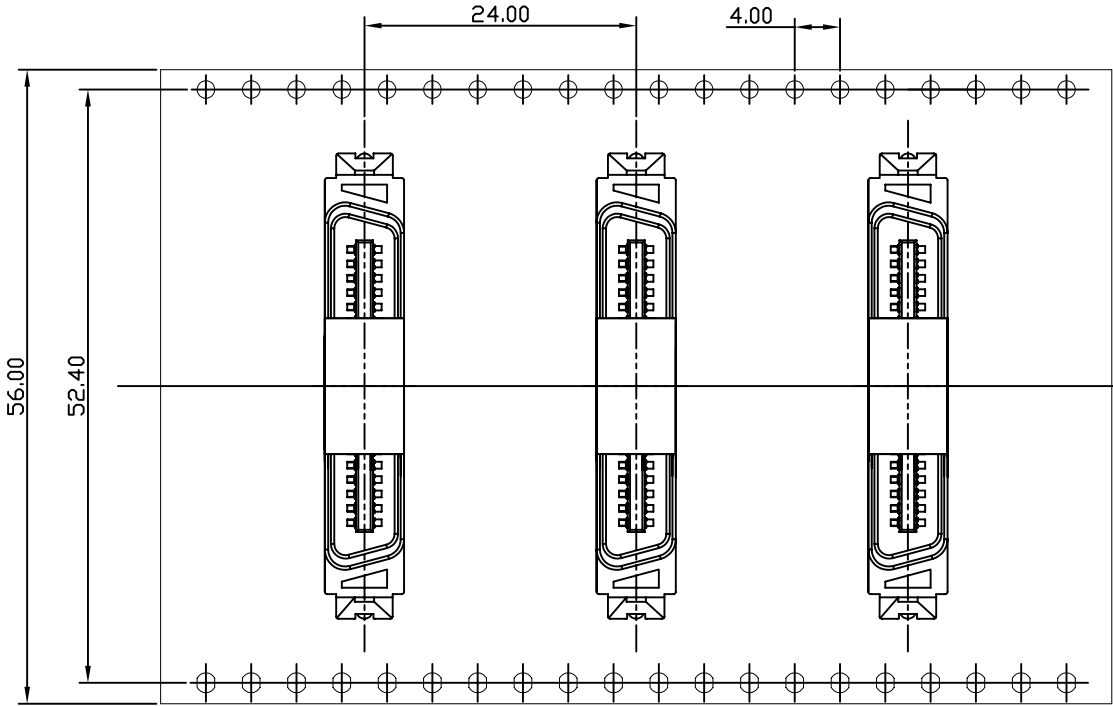

- NOTES
1. CONTACT PLATING:
MATING AREA: GOLD 0.76um.
TERMINATION AREA: PURE MATTE TIN
UNDER PLATING: NICKEL
 2. BOARDLOCK PLATING:
MATING AREA: GOLD FLASH.
TERMINATION AREA: GOLD FLASH.
UNDER PLATING: NICKEL
 3. RECOMMENDED P.C.B THICKNESS: 1.6~1.8mm.
 4. THIS CONNECTOR COMPLIES WITH SFF-8451 (SCA2) STANDARDS.
 5. ORDER P/N: SCA-40-11-001-3
 6. MATERIAL SHOULD BE FULLFILLED AMPHENOL SPEC# SSN002.



4	SCA002001	Pick-cover, HI-Temp thermoplastic (GF) UL94-V0 Black		1
3	SCA302001	Boardlock, Phosphor Bronze, 0.30mm thickness	See Note #2	2
2	SCA401001	Signal Pin, Phosphor Bronze,	See Note #1	40
1	SCA102340	Housing, Plug, HI-Temp thermoplastic (GF) UL94-V0 Black		1
ITEM NO	PART OR IDENTIFICATION NO	NOMENCLATURE OR DESCRIPTION	FLASHED	QTY REQ'D
PARTS LIST				
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL DATE		
U.S. METRIC		DRAWN B H	4/06/09	
.X +/- 0.50		CHECKED Y H	4/06/09	
.XX +/- 0.25		CHECKED		
.XXX +/- 0.20		Amphenol		
FRACTIONS +/-				
ANGLES +/- 5°				
FOR MATERIALS AND FINISHES SEE NOTES				
REMOVE SHARP EDGES		TITLE SCA-2 PLUG CONNECTOR 40 WAYS SMT		
DIMENSIONS		DRAWING FILE : \\DRAWING\SCA\C SCA00110015-2.dwg		
U.S. INCHES		ANGLE OF PROJECTION		
(METRIC) (MM)				
		SIZE DRAWING NO. REV.		
		A3 C SCA-40-11-001-3 2		
		SCALE NONE SHEET 2 OF 2		