

# GPS

## 臥式直接式泵浦

50 HZ 專用



ISO 9001-ISO 14001 認證合格



綠色、安全、永續經營

川源股份有限公司


GSD INDUSTRIAL CO., LTD.



1. 設備配套
2. 高樓給水
3. 一般工業用水
4. 消防給水
5. 土木施工用水
6. 污水處理設備
7. 農業灌溉用水
8. 鍋爐給水

1. 葉輪採用優秀水力模型設計，具有極好的動靜平衡，性能穩定。
2. 泵軸為電機加長軸，同心度絕對可靠。
3. 整台泵採用進口軸承，振動小，噪音低。
4. 單吸、單級臥式離心泵，用封閉葉輪及鍋殼。
5. 同軸直接式構造，效率高，體積小，重量輕，安裝保養容易。
6. 採用機械密封，保證不損軸心，不漏水，使用壽命長。
7. 可根據要求採用不同材質。

## GCOMBINED CONSTRUCTION

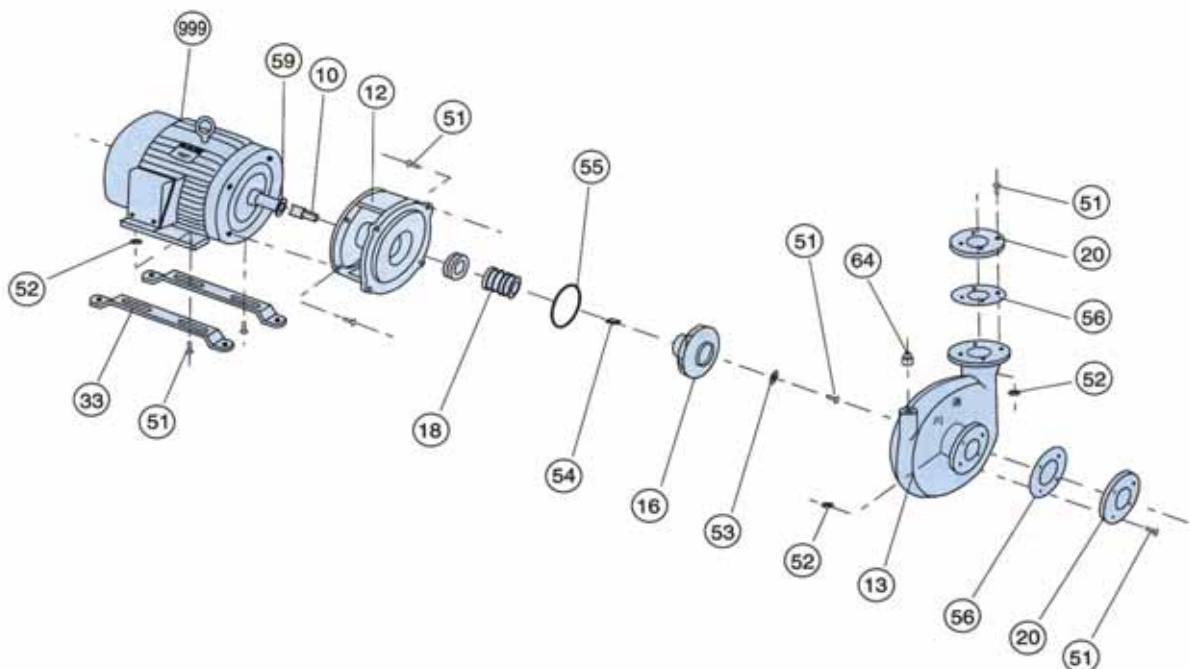

The pump specially apply to air-condition cold or hot water circulation and also apply to the following:

1. Can be used together with equipment
2. Water-supplying system of apartment(building)
3. Industrial water supply
4. Fire-fighting water system
5. Construction engineering water supply
6. Waste water treatment
7. Farm water irrigation
8. Boiler water supply

1. The optimal hydraulic model is used for impeller, the pump is of an utmost dynamic-static balance and reliable performance.
2. The pump shaft is an extended one from the motor, so the concentricity is absolutely reliable.
3. The pump which is supported by imported bearing, runs at little vibration and low noise.
4. Single-stage single-suction horizontal centrifugal pump; closed impeller and volute chamber are adopted.
5. Coaxial volute structure, high efficiency, small volume, light weight, easy installation and maintenance.
6. Mechanical seal, no damage to shaft, no leakage, long duration.
7. Can choose other materials according to the customer's requirement.

## 型號說明


### TYPE DESCRIPTION

**G - 3 10 - 100**

進口口徑 SUC. DIAMETER(mm)  
額定功率 RATED POWER(HP)  
相 數 PHASE  
直接式泵浦 COAXIAL VOLUTE PUMP

## 結構圖

### CONSTRUCTION

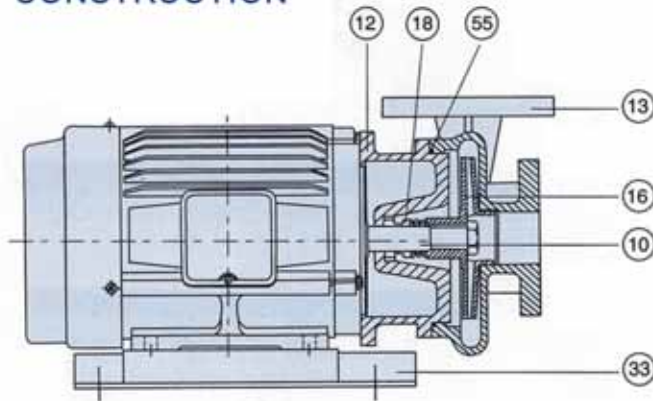


| No  | 名稱<br>NAME           | 材質<br>MATERIAL |
|-----|----------------------|----------------|
| 10  | 主軸 SHAFT             | SUS410         |
| 12  | 中承座 BRACKET          | FC200          |
| 13  | 泵浦本體 PUMP CASING     | FC200          |
| 16  | 葉輪 IMPELLER          | FC200          |
| 18  | 機械密封 MECHANICAL SEAL | CERAMIC-CARBON |
| 20  | 法蘭 FLANGE            | FC200/SS34     |
| 33  | 機座 FEET              | FC200/SS34     |
| 51  | 螺栓 SCREW             | SS34           |
| 52  | 螺母 NUT               | S45C           |
| 53  | 墊片 WASHER            | NBR            |
| 54  | 鍵 KEY                | S45C           |
| 55  | O型環 O-RING           | NBR            |
| 56  | 橡膠墊片 PACKING         | NBR            |
| 59  | 切水環 WATER SLINGER    | NBR            |
| 64  | 塞頭 PLUG              | SUS410         |
| 999 | 電機 MOTOR             |                |

## 曲線圖

### PERFORMANCE CHART


2P

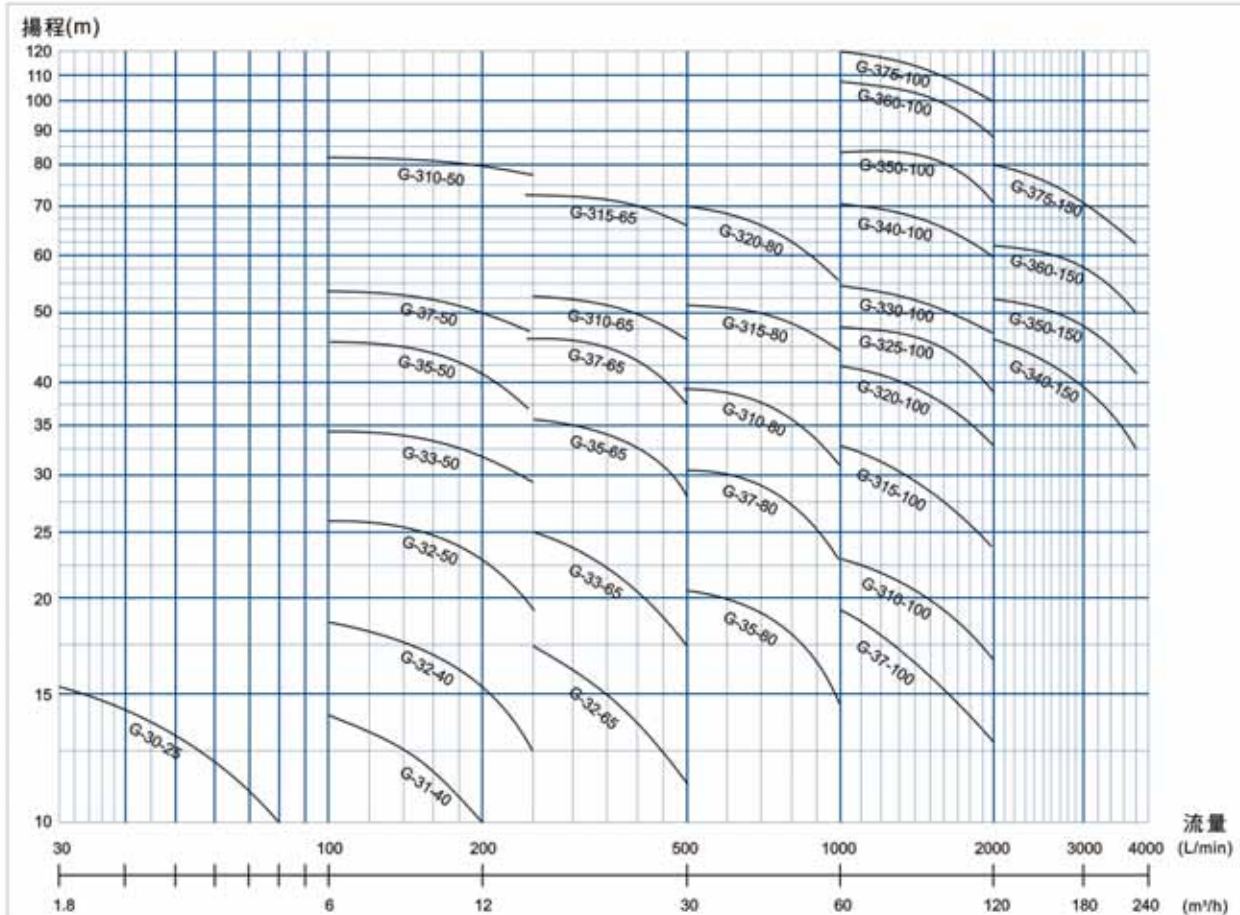



## 曲線圖 PERFORMANCE CHART

4P

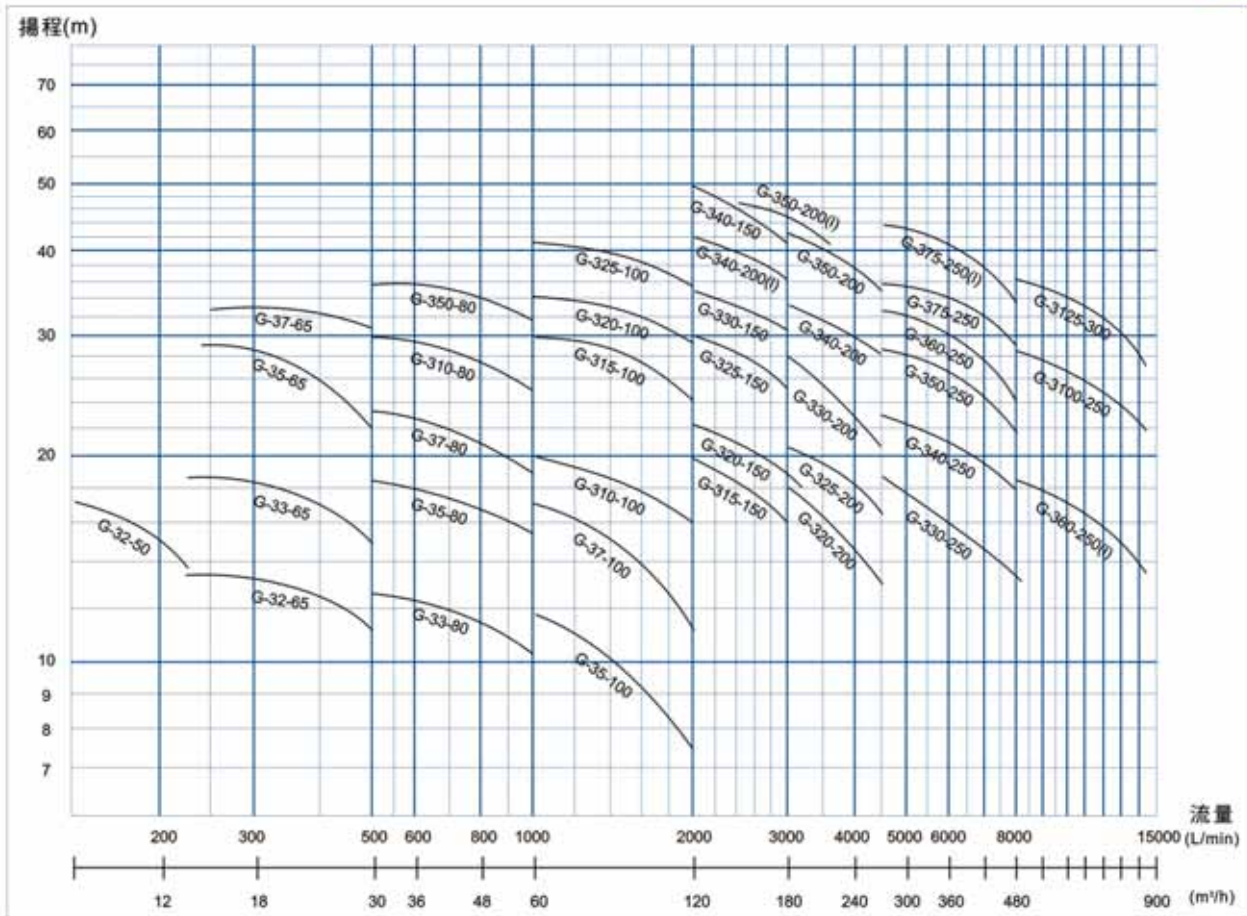

## 性能參數 PERFORMANCE PARAMETERS

**2P**

| 型號<br>TYPE | 轉速<br>SPEED<br>(r/min) | 流量<br>CAPACITY<br>(m³/h) | 揚程<br>HEAD<br>(m) | 效率<br>EFF<br>(%) | 電機功率<br>MOTOR POWER<br>(HP) (kw) |      | 必須氣蝕餘量<br>NPSHr<br>(m) | 口徑<br>DIA<br>(mm) | 重量<br>WEIGHT<br>(kg) |
|------------|------------------------|--------------------------|-------------------|------------------|----------------------------------|------|------------------------|-------------------|----------------------|
| G-30-25    | 2900                   | 2.0                      | 15                | 30               | 0.5                              | 0.37 | 2.0                    | 25                | 23                   |
|            |                        | 2.5                      | 13                | 35               |                                  |      | 2.0                    |                   |                      |
|            |                        | 3                        | 12                | 34               |                                  |      | 2.0                    |                   |                      |
| G-31-40    | 2900                   | 7.2                      | 13                | 50               | 1                                | 0.75 | 2.0                    | 40                | 32                   |
|            |                        | 9                        | 11.5              | 55               |                                  |      | 2.0                    |                   |                      |
|            |                        | 10.8                     | 10.5              | 54               |                                  |      | 2.0                    |                   |                      |
| G-32-40    | 2900                   | 8.8                      | 17.5              | 53               | 2                                | 1.5  | 2.0                    | 40                | 36                   |
|            |                        | 11                       | 16                | 59               |                                  |      | 2.0                    |                   |                      |
|            |                        | 13.2                     | 14                | 58               |                                  |      | 2.2                    |                   |                      |
| G-32-50    | 2900                   | 8.8                      | 25.5              | 47               | 2                                | 1.5  | 2.0                    | 50                | 51                   |
|            |                        | 11                       | 24                | 53               |                                  |      | 2.0                    |                   |                      |
|            |                        | 13.2                     | 21.5              | 52               |                                  |      | 2.2                    |                   |                      |
| G-33-50    | 2900                   | 9.6                      | 33.5              | 49               | 3                                | 2.2  | 2.0                    | 50                | 52                   |
|            |                        | 12                       | 32                | 54               |                                  |      | 2.0                    |                   |                      |
|            |                        | 14.4                     | 29                | 53               |                                  |      | 2.4                    |                   |                      |
| G-35-50    | 2900                   | 8.8                      | 45                | 45               | 5                                | 4    | 2.0                    | 50                | 70                   |
|            |                        | 11                       | 43                | 48               |                                  |      | 2.0                    |                   |                      |
|            |                        | 13.2                     | 39                | 47               |                                  |      | 2.5                    |                   |                      |
| G-37-50    | 2900                   | 10                       | 52                | 46               | 7.5                              | 5.5  | 2.1                    | 50                | 78                   |
|            |                        | 12.5                     | 50                | 48               |                                  |      | 2.2                    |                   |                      |
|            |                        | 15                       | 47                | 46               |                                  |      | 2.5                    |                   |                      |
| G-310-50   | 2900                   | 9.6                      | 82                | 36               | 10                               | 7.5  | 2.2                    | 50                | 90                   |
|            |                        | 12                       | 80                | 41               |                                  |      | 2.4                    |                   |                      |
|            |                        | 14.4                     | 77                | 39               |                                  |      | 2.5                    |                   |                      |
| G-32-65    | 2900                   | 16.8                     | 16.5              | 60               | 2                                | 1.5  | 2.0                    | 65                | 55                   |
|            |                        | 21                       | 15                | 67               |                                  |      | 2.0                    |                   |                      |
|            |                        | 25.2                     | 13                | 66               |                                  |      | 2.5                    |                   |                      |
| G-33-65    | 2900                   | 16.8                     | 24                | 52               | 3                                | 2.2  | 2.0                    | 65                | 58                   |
|            |                        | 21                       | 22                | 61               |                                  |      | 2.1                    |                   |                      |
|            |                        | 25.2                     | 18.5              | 60               |                                  |      | 2.4                    |                   |                      |
| G-35-65    | 2900                   | 20                       | 34                | 60               | 5                                | 4    | 2.0                    | 65                | 74                   |
|            |                        | 25                       | 32                | 65               |                                  |      | 2.0                    |                   |                      |
|            |                        | 30                       | 28                | 64               |                                  |      | 2.5                    |                   |                      |
| G-37-65    | 2900                   | 18.4                     | 45.5              | 53               | 7.5                              | 5.5  | 2.0                    | 65                | 100                  |
|            |                        | 23                       | 44                | 59               |                                  |      | 2.0                    |                   |                      |
|            |                        | 27.6                     | 40.5              | 58               |                                  |      | 2.5                    |                   |                      |
| G-310-65   | 2900                   | 20                       | 51.5              | 57               | 10                               | 7.5  | 2.0                    | 65                | 110                  |
|            |                        | 25                       | 50                | 61               |                                  |      | 2.0                    |                   |                      |
|            |                        | 30                       | 47                | 60               |                                  |      | 2.5                    |                   |                      |
| G-315-65   | 2900                   | 18.4                     | 72                | 48               | 15                               | 11   | 2.0                    | 65                | 180                  |
|            |                        | 23                       | 70                | 52               |                                  |      | 2.0                    |                   |                      |
|            |                        | 27.6                     | 66.5              | 51               |                                  |      | 2.5                    |                   |                      |
| G-35-80    | 2900                   | 36                       | 20                | 66               | 5                                | 4    | 3.0                    | 80                | 72                   |
|            |                        | 45                       | 18                | 73               |                                  |      | 3.0                    |                   |                      |
|            |                        | 54                       | 15.5              | 72               |                                  |      | 3.5                    |                   |                      |

## 性能參數

## PERFORMANCE PARAMETERS

2P

| 型號<br>TYPE | 轉速<br>SPEED<br>(r/min) | 流量<br>CAPACITY<br>(m³/h) | 揚程<br>HEAD<br>(m) | 效率<br>EFF<br>(%) | 電機功率<br>MOTOR POWER<br>(HP) (kw) |      | 必須氣蝕餘量<br>NPSHr<br>(m) | 口徑<br>DIA<br>(mm) | 重量<br>WEIGHT<br>(kg) |
|------------|------------------------|--------------------------|-------------------|------------------|----------------------------------|------|------------------------|-------------------|----------------------|
| G-37-80    | 2900                   | 36                       | 30                | 68               | 7.5                              | 5.5  | 2.5                    | 80                | 98                   |
|            |                        | 45                       | 28                | 72               |                                  |      | 2.5                    |                   |                      |
|            |                        | 54                       | 25                | 72               |                                  |      | 2.5                    |                   |                      |
| G-310-80   | 2900                   | 34.4                     | 39                | 62               | 10                               | 7.5  | 2.5                    | 80                | 110                  |
|            |                        | 43                       | 37                | 69               |                                  |      | 2.5                    |                   |                      |
|            |                        | 51.6                     | 34                | 68               |                                  |      | 3.0                    |                   |                      |
| G-315-80   | 2900                   | 40                       | 50.5              | 63               | 15                               | 11   | 2.5                    | 80                | 170                  |
|            |                        | 50                       | 48                | 69               |                                  |      | 2.5                    |                   |                      |
|            |                        | 60                       | 45                | 68               |                                  |      | 3.0                    |                   |                      |
| G-320-80   | 2900                   | 36                       | 69                | 56               | 20                               | 15   | 2.5                    | 80                | 175                  |
|            |                        | 45                       | 65                | 63               |                                  |      | 2.5                    |                   |                      |
|            |                        | 54                       | 58                | 62               |                                  |      | 3.0                    |                   |                      |
| G-37-100   | 2900                   | 68                       | 17.5              | 68               | 7                                | 5.5  | 4.0                    | 100               | 98                   |
|            |                        | 85                       | 16                | 76               |                                  |      | 4.5                    |                   |                      |
|            |                        | 102                      | 14                | 75               |                                  |      | 4.5                    |                   |                      |
| G-310-100  | 2900                   | 72                       | 22.5              | 69               | 10                               | 7.5  | 4.0                    | 100               | 110                  |
|            |                        | 90                       | 20                | 76               |                                  |      | 4.5                    |                   |                      |
|            |                        | 108                      | 18                | 75               |                                  |      | 5.0                    |                   |                      |
| G-315-100  | 2900                   | 72                       | 31.5              | 71               | 15                               | 11   | 3.5                    | 100               | 200                  |
|            |                        | 90                       | 28                | 77               |                                  |      | 4.0                    |                   |                      |
|            |                        | 108                      | 26                | 76               |                                  |      | 5.0                    |                   |                      |
| G-320-100  | 2900                   | 68                       | 42                | 69               | 20                               | 15   | 3.0                    | 100               | 210                  |
|            |                        | 85                       | 40                | 74               |                                  |      | 3.5                    |                   |                      |
|            |                        | 102                      | 36.5              | 73               |                                  |      | 3.6                    |                   |                      |
| G-325-100  | 2900                   | 76                       | 47                | 70               | 25                               | 18.5 | 2.5                    | 100               | 260                  |
|            |                        | 95                       | 45                | 76               |                                  |      | 2.5                    |                   |                      |
|            |                        | 114                      | 41                | 75               |                                  |      | 3.0                    |                   |                      |
| G-330-100  | 2900                   | 80                       | 52.5              | 70               | 30                               | 22   | 3.0                    | 100               | 320                  |
|            |                        | 100                      | 50                | 77               |                                  |      | 3.5                    |                   |                      |
|            |                        | 120                      | 46                | 76               |                                  |      | 4.0                    |                   |                      |
| G-340-100  | 2900                   | 77                       | 69                | 61               | 40                               | 30   | 2.5                    | 100               | 390                  |
|            |                        | 96                       | 65                | 66               |                                  |      | 3.5                    |                   |                      |
|            |                        | 115                      | 59                | 65               |                                  |      | 4.0                    |                   |                      |
| G-350-100  | 2900                   | 80                       | 84                | 65               | 50                               | 37   | 2.5                    | 100               | 430                  |
|            |                        | 100                      | 80                | 70               |                                  |      | 3.5                    |                   |                      |
|            |                        | 120                      | 72                | 69               |                                  |      | 4.0                    |                   |                      |
| G-360-100  | 2900                   | 76                       | 106               | 62               | 60                               | 45   | 2.5                    | 100               | 460                  |
|            |                        | 95                       | 100               | 68               |                                  |      | 3.5                    |                   |                      |
|            |                        | 114                      | 91                | 67               |                                  |      | 4.0                    |                   |                      |
| G-375-100  | 2900                   | 76                       | 116               | 60               | 75                               | 55   | 3.0                    | 100               | 550                  |
|            |                        | 95                       | 110               | 66               |                                  |      | 3.0                    |                   |                      |
|            |                        | 114                      | 102               | 65               |                                  |      | 4.0                    |                   |                      |
| G-340-150  | 2900                   | 144                      | 43                | 71               | 40                               | 30   | 3.1                    | 150               | 440                  |
|            |                        | 180                      | 40                | 76               |                                  |      | 3.1                    |                   |                      |
|            |                        | 216                      | 35                | 75               |                                  |      | 3.4                    |                   |                      |
| G-350-150  | 2900                   | 144                      | 51                | 70               | 50                               | 37   | 3.0                    | 150               | 452                  |
|            |                        | 180                      | 48                | 75               |                                  |      | 3.0                    |                   |                      |
|            |                        | 216                      | 43.5              | 74               |                                  |      | 4.0                    |                   |                      |
| G-360-150  | 2900                   | 144                      | 61                | 70               | 60                               | 45   | 3.5                    | 150               | 510                  |
|            |                        | 180                      | 58                | 75               |                                  |      | 3.5                    |                   |                      |
|            |                        | 216                      | 52                | 74               |                                  |      | 4.5                    |                   |                      |
| G-375-150  | 2900                   | 150                      | 76                | 68               | 75                               | 55   | 4.0                    | 150               | 580                  |
|            |                        | 187                      | 70                | 74               |                                  |      | 4.0                    |                   |                      |
|            |                        | 224                      | 63                | 73               |                                  |      | 5.0                    |                   |                      |

## 性能參數

## PERFORMANCE PARAMETERS

4P

| 型號<br>TYPE | 轉速<br>SPEED<br>(r/min) | 流量<br>CAPACITY<br>(m³/h) | 揚程<br>HEAD<br>(m) | 效率<br>EFF<br>(%) | 電機功率<br>MOTOR POWER<br>(HP) (kw) |     | 必須氣蝕餘量<br>NPSHr<br>(m) | 口徑<br>DIA<br>(mm) | 重量<br>WEIGHT<br>(kg) |
|------------|------------------------|--------------------------|-------------------|------------------|----------------------------------|-----|------------------------|-------------------|----------------------|
| G-32-50    | 1450                   | 8                        | 17.5              | 43               | 2                                | 1.5 | 2.5                    | 50                | 64                   |
|            |                        | 10                       | 16                | 49               |                                  |     | 2.5                    |                   |                      |
|            |                        | 12                       | 15                | 48               |                                  |     | 3.0                    |                   |                      |
| G-32-65    | 1450                   | 18.4                     | 13.2              | 58               | 2                                | 1.5 | 2.5                    | 65                | 65                   |
|            |                        | 23                       | 12.5              | 65               |                                  |     | 2.5                    |                   |                      |
|            |                        | 27.6                     | 11.8              | 64               |                                  |     | 3.0                    |                   |                      |
| G-33-65    | 1450                   | 18.4                     | 18.3              | 53               | 3                                | 2.2 | 2.5                    | 65                | 75                   |
|            |                        | 23                       | 17                | 58               |                                  |     | 2.5                    |                   |                      |
|            |                        | 27.6                     | 15.5              | 52               |                                  |     | 3.0                    |                   |                      |
| G-35-65    | 1450                   | 17.6                     | 29                | 47               | 5                                | 4   | 2.5                    | 65                | 86                   |
|            |                        | 22                       | 27                | 51               |                                  |     | 2.5                    |                   |                      |
|            |                        | 26.4                     | 24.5              | 50               |                                  |     | 3.0                    |                   |                      |
| G-37-65    | 1450                   | 20                       | 33                | 48               | 7.5                              | 5.5 | 2.5                    | 65                | 125                  |
|            |                        | 25                       | 32                | 54               |                                  |     | 2.5                    |                   |                      |
|            |                        | 30                       | 30.8              | 53               |                                  |     | 3.0                    |                   |                      |
| G-33-80    | 1450                   | 33.6                     | 12.5              | 65               | 3                                | 2.2 | 2.0                    | 80                | 75                   |
|            |                        | 42                       | 12                | 72               |                                  |     | 2.0                    |                   |                      |
|            |                        | 50.4                     | 10.5              | 71               |                                  |     | 2.5                    |                   |                      |
| G-35-80    | 1450                   | 36.8                     | 18                | 62               | 5                                | 4   | 2.0                    | 80                | 90                   |
|            |                        | 46                       | 17                | 66               |                                  |     | 2.0                    |                   |                      |
|            |                        | 55.2                     | 15.8              | 65               |                                  |     | 2.5                    |                   |                      |
| G-37-80    | 1450                   | 32                       | 23.5              | 43               | 7.5                              | 5.5 | 2.0                    | 80                | 125                  |
|            |                        | 40                       | 22                | 59               |                                  |     | 2.0                    |                   |                      |
|            |                        | 48                       | 19.5              | 58               |                                  |     | 2.5                    |                   |                      |



# GPS 臥式直接式泵浦

## 性能參數

## PERFORMANCE PARAMETERS

4P

| 型號<br>TYPE   | 轉速<br>SPEED<br>(r/min) | 流量<br>CAPACITY<br>(m³/h) | 揚程<br>HEAD<br>(m) | 效率<br>EFF<br>(%) | 電機功率<br>MOTOR POWER<br>(HP) (kw) |      | 必須氣蝕餘量<br>NPSHr<br>(m) | 口徑<br>DIA<br>(mm) | 重量<br>WEIGHT<br>(kg) |
|--------------|------------------------|--------------------------|-------------------|------------------|----------------------------------|------|------------------------|-------------------|----------------------|
| G-310-80     | 1450                   | 36.8                     | 29.5              | 58               | 10                               | 7.5  | 2.0                    | 80                | 145                  |
|              |                        | 46                       | 28                | 62               |                                  |      | 2.0                    |                   |                      |
|              |                        | 55.2                     | 26                | 61               |                                  |      | 2.5                    |                   |                      |
| G-315-80     | 1450                   | 40                       | 35.2              | 60               | 15                               | 11   | 2.0                    | 80                | 190                  |
|              |                        | 50                       | 33                | 64               |                                  |      | 2.0                    |                   |                      |
|              |                        | 60                       | 32                | 63               |                                  |      | 2.5                    |                   |                      |
| G35-100      | 1450                   | 68                       | 11                | 66               | 5                                | 4    | 2.5                    | 100               | 112                  |
|              |                        | 85                       | 10                | 71               |                                  |      | 2.5                    |                   |                      |
|              |                        | 102                      | 8.5               | 70               |                                  |      | 3.0                    |                   |                      |
| G-37-100     | 1450                   | 68                       | 16.6              | 67               | 7.5                              | 5.5  | 2.5                    | 100               | 135                  |
|              |                        | 85                       | 15                | 73               |                                  |      | 2.5                    |                   |                      |
|              |                        | 102                      | 13.2              | 72               |                                  |      | 3.0                    |                   |                      |
| G-310-100    | 1450                   | 76                       | 19.2              | 69               | 10                               | 7.5  | 2.5                    | 100               | 150                  |
|              |                        | 95                       | 18                | 74               |                                  |      | 2.5                    |                   |                      |
|              |                        | 114                      | 16.5              | 73               |                                  |      | 3.0                    |                   |                      |
| G-315-100    | 1450                   | 72                       | 29.5              | 64               | 15                               | 11   | 2.5                    | 100               | 190                  |
|              |                        | 90                       | 28                | 70               |                                  |      | 2.5                    |                   |                      |
|              |                        | 108                      | 25                | 69               |                                  |      | 3.0                    |                   |                      |
| G-320-100    | 1450                   | 80                       | 33.5              | 67               | 20                               | 15   | 2.5                    | 100               | 225                  |
|              |                        | 100                      | 32                | 72               |                                  |      | 2.5                    |                   |                      |
|              |                        | 120                      | 29.5              | 71               |                                  |      | 3.0                    |                   |                      |
| G-325-100    | 1450                   | 80                       | 40                | 66               | 25                               | 18.5 | 2.5                    | 100               | 263                  |
|              |                        | 100                      | 38                | 72               |                                  |      | 2.5                    |                   |                      |
|              |                        | 120                      | 35.5              | 71               |                                  |      | 3.0                    |                   |                      |
| G-315-150    | 1450                   | 120                      | 19.5              | 74               | 15                               | 11   | 2.5                    | 150               | 210                  |
|              |                        | 150                      | 18                | 81               |                                  |      | 2.5                    |                   |                      |
|              |                        | 180                      | 16                | 80               |                                  |      | 3.0                    |                   |                      |
| G-320-150    | 1450                   | 128                      | 21.5              | 75               | 20                               | 15   | 2.5                    | 150               | 240                  |
|              |                        | 160                      | 20                | 82               |                                  |      | 2.5                    |                   |                      |
|              |                        | 192                      | 18                | 81               |                                  |      | 3.0                    |                   |                      |
| G-325-150    | 1450                   | 120                      | 30                | 66               | 25                               | 18.5 | 2.5                    | 150               | 300                  |
|              |                        | 150                      | 28                | 73               |                                  |      | 2.5                    |                   |                      |
|              |                        | 180                      | 25                | 72               |                                  |      | 3.0                    |                   |                      |
| G-330-150    | 1450                   | 128                      | 34.8              | 68               | 30                               | 22   | 2.5                    | 150               | 330                  |
|              |                        | 160                      | 32                | 74               |                                  |      | 2.5                    |                   |                      |
|              |                        | 192                      | 28                | 73               |                                  |      | 3.0                    |                   |                      |
| G-340-150    | 1450                   | 120                      | 48.5              | 66               | 40                               | 30   | 3.0                    | 150               | 410                  |
|              |                        | 150                      | 45                | 72               |                                  |      | 3.0                    |                   |                      |
|              |                        | 180                      | 41                | 71               |                                  |      | 3.5                    |                   |                      |
| G-320-220    | 1450                   | 148                      | 19.2              | 72               | 20                               | 15   | 2.5                    | 200               | 270                  |
|              |                        | 185                      | 18                | 78               |                                  |      | 2.5                    |                   |                      |
|              |                        | 222                      | 16                | 77               |                                  |      | 3.0                    |                   |                      |
| G-325-200    | 1450                   | 160                      | 21.5              | 72               | 25                               | 18.5 | 2.5                    | 200               | 300                  |
|              |                        | 200                      | 20                | 80               |                                  |      | 2.5                    |                   |                      |
|              |                        | 240                      | 18                | 78               |                                  |      | 3.0                    |                   |                      |
| G-330-220    | 1450                   | 148                      | 31                | 72               | 30                               | 22   | 3.0                    | 200               | 370                  |
|              |                        | 185                      | 28                | 78               |                                  |      | 3.0                    |                   |                      |
|              |                        | 222                      | 24                | 77               |                                  |      | 3.5                    |                   |                      |
| G-340-220    | 1450                   | 160                      | 34.6              | 72               | 40                               | 30   | 3.0                    | 200               | 400                  |
|              |                        | 200                      | 32                | 79               |                                  |      | 3.0                    |                   |                      |
|              |                        | 240                      | 30                | 78               |                                  |      | 3.5                    |                   |                      |
| G-340-200(I) | 1450                   | 136                      | 41                | 66               | 40                               | 30   | 2.5                    | 200               | 420                  |
|              |                        | 170                      | 38                | 72               |                                  |      | 2.5                    |                   |                      |
|              |                        | 204                      | 34                | 71               |                                  |      | 3.0                    |                   |                      |
| G-350-200    | 1450                   | 176                      | 43                | 70               | 50                               | 37   | 3.0                    | 200               | 430                  |
|              |                        | 220                      | 40                | 76               |                                  |      | 3.5                    |                   |                      |
|              |                        | 264                      | 36                | 74               |                                  |      | 4.0                    |                   |                      |
| G-350-200(I) | 1450                   | 144                      | 46.5              | 69               | 50                               | 37   | 3.0                    | 200               | 430                  |
|              |                        | 180                      | 44                | 75               |                                  |      | 3.5                    |                   |                      |
|              |                        | 216                      | 40.5              | 73               |                                  |      | 4.0                    |                   |                      |
| G-330-250    | 1450                   | 288                      | 18                | 73               | 30                               | 22   | 4.0                    | 250               | 440                  |
|              |                        | 360                      | 16                | 79               |                                  |      | 5.0                    |                   |                      |
|              |                        | 432                      | 14                | 78               |                                  |      | 6.0                    |                   |                      |
| G-340-250    | 1450                   | 320                      | 22                | 74               | 40                               | 30   | 3.0                    | 250               | 520                  |
|              |                        | 400                      | 20                | 80               |                                  |      | 3.5                    |                   |                      |
|              |                        | 480                      | 17                | 79               |                                  |      | 5.0                    |                   |                      |
| G-350-250    | 1450                   | 304                      | 28                | 75               | 50                               | 37   | 3.5                    | 250               | 570                  |
|              |                        | 380                      | 26                | 78               |                                  |      | 4.0                    |                   |                      |
|              |                        | 456                      | 22                | 77               |                                  |      | 5.0                    |                   |                      |
| G-360-250    | 1450                   | 320                      | 31                | 72               | 60                               | 45   | 3.5                    | 250               | 590                  |
|              |                        | 400                      | 28                | 78               |                                  |      | 4.0                    |                   |                      |
|              |                        | 480                      | 24                | 77               |                                  |      | 5.0                    |                   |                      |
| G-360-250(I) | 1450                   | 560                      | 17.5              | 74               | 60                               | 45   | 6.0                    | 250               | 550                  |
|              |                        | 700                      | 16                | 79               |                                  |      | 6.0                    |                   |                      |
|              |                        | 840                      | 14                | 78               |                                  |      | 6.0                    |                   |                      |
| G-375-250    | 1450                   | 320                      | 34.5              | 75               | 75                               | 55   | 5.0                    | 250               | 690                  |
|              |                        | 400                      | 33                | 81               |                                  |      | 5.5                    |                   |                      |
|              |                        | 480                      | 28.5              | 80               |                                  |      | 6.0                    |                   |                      |
| G-375-250(I) | 1450                   | 296                      | 43                | 75               | 75                               | 55   | 5.0                    | 250               | 660                  |
|              |                        | 370                      | 40                | 80               |                                  |      | 5.0                    |                   |                      |
|              |                        | 444                      | 35                | 79               |                                  |      | 5.5                    |                   |                      |
| G-3100-250   | 1450                   | 560                      | 27.5              | 76               | 100                              | 75   | 6.0                    | 250               | 785                  |
|              |                        | 700                      | 25                | 81               |                                  |      | 6.0                    |                   |                      |
|              |                        | 840                      | 21.5              | 80               |                                  |      | 6.0                    |                   |                      |
| G-3125-300   | 1450                   | 576                      | 35                | 76               | 125                              | 90   | 6.0                    | 300               | 1150                 |
|              |                        | 720                      | 32                | 81               |                                  |      | 6.0                    |                   |                      |
|              |                        | 864                      | 28                | 80               |                                  |      | 6.3                    |                   |                      |

## 外形及安裝尺寸

### INSTALLATION DIMENSIONS

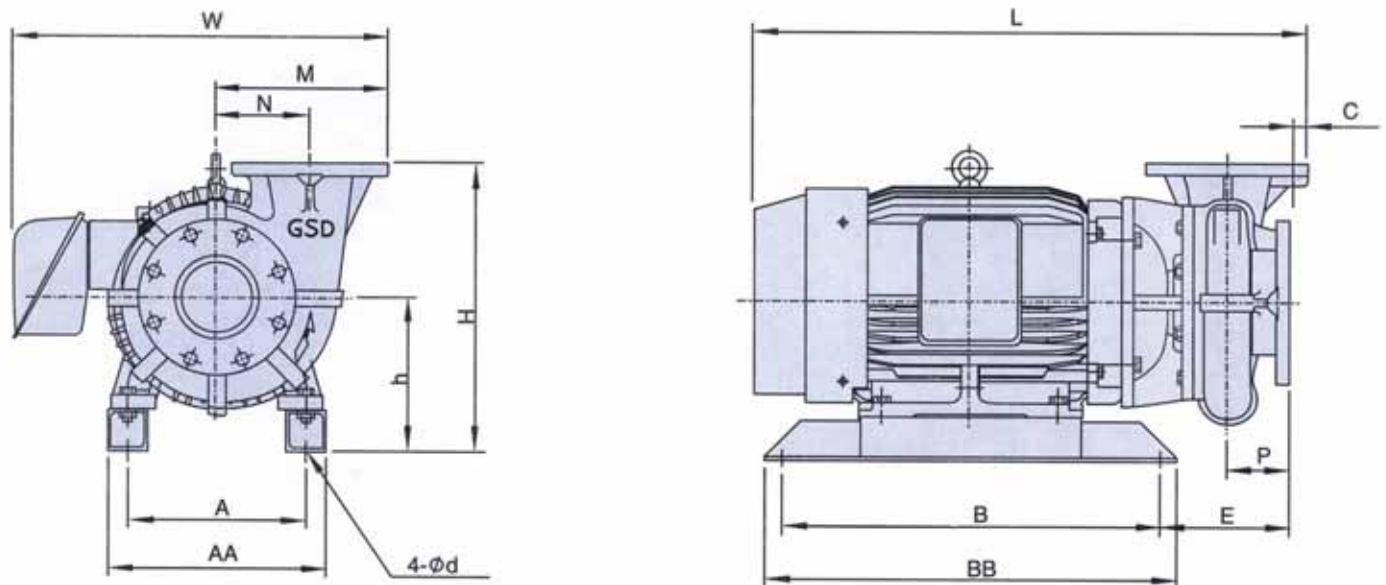


FIG.1

2P

| 型號<br>TYPE | FIG | A   | AA  | B   | BB  | C  | φd | E   | H   | h   | L   | N   | M   | P   | W   |
|------------|-----|-----|-----|-----|-----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|
| G-30-25    | 1   | 112 | 162 | 250 | 290 | 5  | 12 | 84  | 190 | 101 | 334 | 71  | 119 | 52  | 249 |
| G-31-40    | 1   | 125 | 175 | 290 | 320 | 4  | 15 | 79  | 218 | 110 | 367 | 78  | 138 | 57  | 284 |
| G-32-40    | 1   | 140 | 192 | 290 | 320 | 4  | 15 | 97  | 228 | 120 | 404 | 78  | 138 | 57  | 302 |
| G-32-50    | 1   | 140 | 192 | 290 | 320 | 3  | 15 | 116 | 245 | 120 | 419 | 85  | 150 | 68  | 314 |
| G-33-50    | 1   | 140 | 210 | 290 | 340 | 19 | 14 | 138 | 315 | 165 | 441 | 123 | 188 | 84  | 352 |
| G-35-50    | 1   | 190 | 260 | 290 | 340 | 19 | 14 | 170 | 337 | 187 | 497 | 123 | 188 | 84  | 368 |
| G-37-50    | 1   | 216 | 286 | 290 | 340 | 19 | 14 | 183 | 357 | 207 | 539 | 123 | 188 | 84  | 401 |
| G-310-50   | 1   | 216 | 286 | 290 | 340 | 3  | 14 | 211 | 387 | 207 | 570 | 153 | 246 | 90  | 456 |
| G-32-65    | 1   | 140 | 192 | 290 | 320 | 3  | 15 | 126 | 260 | 120 | 432 | 90  | 168 | 75  | 332 |
| G-33-65    | 1   | 140 | 192 | 290 | 320 | 3  | 15 | 126 | 260 | 120 | 432 | 90  | 168 | 75  | 332 |
| G-35-65    | 1   | 190 | 242 | 290 | 320 | 3  | 15 | 180 | 312 | 142 | 510 | 115 | 208 | 90  | 388 |
| G-37-65    | 1   | 216 | 278 | 390 | 436 | 3  | 18 | 143 | 335 | 165 | 551 | 115 | 208 | 90  | 420 |
| G-310-65   | 1   | 216 | 278 | 390 | 436 | 3  | 18 | 158 | 335 | 165 | 567 | 115 | 208 | 90  | 420 |
| G-315-65   | 1   | 254 | 324 | 500 | 560 | 3  | 18 | 162 | 415 | 235 | 695 | 153 | 246 | 90  | 519 |
| G-35-80    | 1   | 190 | 242 | 290 | 320 | 15 | 15 | 183 | 292 | 142 | 526 | 95  | 200 | 90  | 380 |
| G-37-80    | 1   | 216 | 278 | 390 | 436 | 3  | 18 | 143 | 335 | 165 | 551 | 115 | 208 | 90  | 420 |
| G-310-80   | 1   | 216 | 278 | 390 | 436 | 3  | 18 | 158 | 335 | 165 | 567 | 115 | 208 | 90  | 420 |
| G-315-80   | 1   | 254 | 324 | 500 | 560 | 3  | 18 | 162 | 415 | 235 | 695 | 153 | 246 | 90  | 519 |
| G-320-80   | 1   | 254 | 324 | 500 | 560 | 3  | 18 | 162 | 415 | 235 | 695 | 153 | 246 | 90  | 521 |
| G-37-100   | 1   | 216 | 278 | 390 | 436 | 15 | 18 | 146 | 315 | 165 | 567 | 95  | 200 | 90  | 412 |
| G-310-100  | 1   | 216 | 278 | 390 | 436 | 15 | 18 | 161 | 315 | 165 | 582 | 95  | 200 | 90  | 413 |
| G-315-100  | 1   | 254 | 324 | 500 | 560 | 15 | 18 | 159 | 435 | 235 | 704 | 120 | 225 | 90  | 498 |
| G-320-100  | 1   | 254 | 324 | 500 | 560 | 4  | 18 | 185 | 435 | 235 | 719 | 160 | 265 | 101 | 540 |
| G-325-100  | 1   | 254 | 324 | 580 | 640 | 4  | 18 | 236 | 435 | 235 | 832 | 160 | 265 | 101 | 538 |
| G-330-100  | 1   | 279 | 349 | 580 | 640 | 4  | 18 | 225 | 455 | 255 | 844 | 160 | 265 | 101 | 603 |
| G-340-100  | 1   | 279 | 349 | 650 | 710 | 4  | 18 | 207 | 455 | 255 | 869 | 160 | 265 | 101 | 604 |
| G-350-100  | 1   | 318 | 388 | 650 | 710 | 33 | 18 | 225 | 515 | 275 | 957 | 168 | 308 | 107 | 673 |
| G-360-100  | 1   | 356 | 456 | 750 | 810 | 1  | 24 | 169 | 572 | 165 | 930 | 182 | 287 | 104 | 682 |
| G-375-100  | 1   | 356 | 456 | 750 | 810 | 1  | 24 | 169 | 375 | 332 | 930 | 182 | 287 | 104 | 682 |
| G-340-150  | 1   | 279 | 349 | 650 | 710 | 28 | 18 | 220 | 515 | 255 | 906 | 155 | 295 | 112 | 634 |
| G-350-150  | 1   | 318 | 388 | 650 | 710 | 28 | 18 | 244 | 535 | 275 | 971 | 155 | 295 | 112 | 659 |
| G-360-150  | 1   | 318 | 388 | 650 | 710 | 28 | 18 | 244 | 535 | 275 | 971 | 155 | 295 | 112 | 659 |
| G-375-150  | 1   | 356 | 456 | 750 | 810 | 33 | 24 | 173 | 572 | 332 | 966 | 168 | 308 | 107 | 702 |



# GPS 臥式直接式泵浦

## 外形及安裝尺寸

### INSTALLATION DIMENSIONS

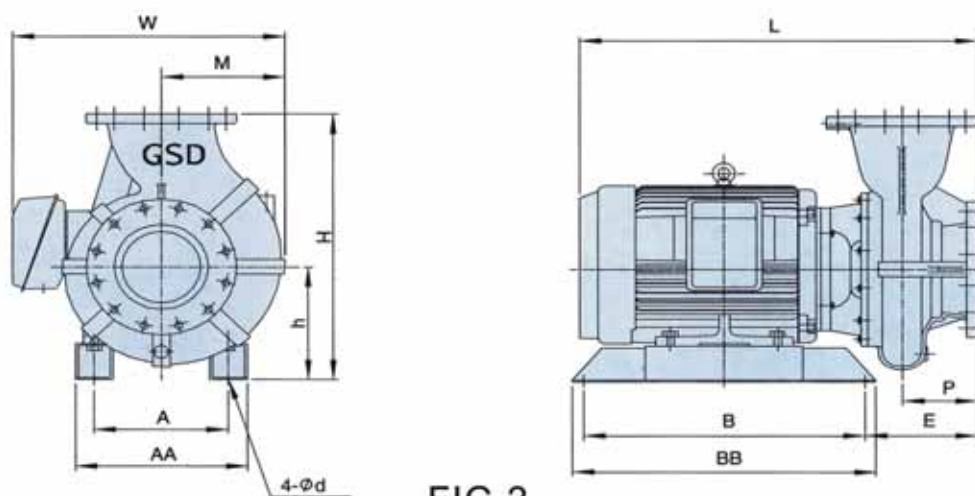


FIG.2

4P

| 型號<br>TYPE   | FIG | A   | AA  | B   | BB   | C  | φd | E   | H    | h   | L    | N     | M   | P   | W   |
|--------------|-----|-----|-----|-----|------|----|----|-----|------|-----|------|-------|-----|-----|-----|
| G-32-50      | 1   | 140 | 203 | 290 | 340  | 13 | 14 | 143 | 382  | 197 | 446  | 139   | 217 | 90  | 387 |
| G-32-65      | 1   | 140 | 203 | 290 | 340  | 13 | 14 | 143 | 382  | 197 | 446  | 139   | 217 | 90  | 387 |
| G-33-65      | 1   | 140 | 203 | 290 | 340  | 13 | 14 | 171 | 392  | 207 | 491  | 139   | 217 | 90  | 381 |
| G-35-65      | 1   | 190 | 253 | 290 | 340  | 10 | 14 | 180 | 459  | 219 | 514  | 179   | 272 | 90  | 464 |
| G-37-65      | 1   | 216 | 279 | 290 | 340  | 10 | 14 | 221 | 479  | 239 | 577  | 179   | 272 | 101 | 484 |
| G-33-80      | 1   | 160 | 223 | 290 | 340  | 3  | 14 | 173 | 387  | 207 | 496  | 153   | 246 | 90  | 419 |
| G-35-80      | 1   | 190 | 253 | 290 | 340  | 3  | 14 | 180 | 399  | 219 | 506  | 153   | 246 | 90  | 432 |
| G-37-80      | 1   | 216 | 279 | 290 | 340  | 1  | 14 | 237 | 479  | 239 | 594  | 182   | 287 | 104 | 500 |
| G-310-80     | 1   | 216 | 279 | 390 | 450  | 1  | 14 | 206 | 479  | 239 | 632  | 182   | 287 | 104 | 501 |
| G-315-80     | 1   | 254 | 324 | 500 | 560  | 1  | 18 | 185 | 475  | 235 | 716  | 182   | 287 | 104 | 560 |
| G-35-100     | 1   | 190 | 253 | 290 | 340  | 4  | 14 | 203 | 419  | 219 | 530  | 160   | 265 | 101 | 451 |
| G-37-100     | 1   | 216 | 279 | 290 | 340  | 4  | 14 | 237 | 439  | 239 | 597  | 160   | 265 | 101 | 478 |
| G-310-100    | 1   | 216 | 279 | 390 | 450  | 4  | 14 | 206 | 439  | 239 | 634  | 160   | 265 | 101 | 478 |
| G-315-100    | 1   | 254 | 324 | 500 | 560  | 1  | 18 | 185 | 475  | 235 | 716  | 182   | 287 | 104 | 560 |
| G-320-100    | 1   | 254 | 324 | 500 | 560  | 20 | 18 | 230 | 515  | 235 | 802  | 190   | 330 | 120 | 603 |
| G-325-100    | 1   | 279 | 359 | 580 | 640  | 25 | 18 | 271 | 613  | 313 | 911  | 226.5 | 392 | 140 | 729 |
| G-315-150    | 1   | 254 | 324 | 500 | 560  | 33 | 18 | 189 | 475  | 235 | 752  | 168   | 308 | 107 | 581 |
| G-320-150    | 1   | 254 | 324 | 500 | 560  | 33 | 18 | 211 | 475  | 235 | 796  | 168   | 308 | 107 | 581 |
| G-325-150    | 1   | 279 | 349 | 580 | 640  | 20 | 18 | 238 | 535  | 255 | 873  | 190   | 330 | 120 | 668 |
| G-330-150    | 1   | 279 | 349 | 580 | 640  | 20 | 18 | 238 | 535  | 255 | 873  | 190   | 330 | 120 | 668 |
| G-340-150    | 1   | 279 | 359 | 650 | 710  | 25 | 18 | 253 | 587  | 287 | 936  | 226.5 | 392 | 140 | 731 |
| G-320-200    | 1   | 254 | 334 | 580 | 640  | 0  | 18 | 241 | 517  | 267 | 833  | 185   | 350 | 165 | 623 |
| G-325-200    | 1   | 279 | 359 | 580 | 640  | 0  | 18 | 299 | 587  | 287 | 914  | 210   | 375 | 165 | 713 |
| G-330-200    | 1   | 279 | 359 | 580 | 640  | 0  | 18 | 299 | 587  | 287 | 914  | 210   | 375 | 165 | 713 |
| G-340-200    | 1   | 279 | 359 | 650 | 710  | 0  | 18 | 281 | 587  | 287 | 939  | 210   | 375 | 165 | 714 |
| G-340-200(I) | 1   | 279 | 359 | 650 | 710  | 25 | 18 | 253 | 587  | 287 | 936  | 226.5 | 392 | 140 | 731 |
| G-350-200    | 1   | 318 | 398 | 650 | 710  | 25 | 18 | 277 | 607  | 307 | 1001 | 226.5 | 392 | 140 | 756 |
| G-350-200(I) | 1   | 318 | 398 | 650 | 710  | 25 | 18 | 277 | 607  | 307 | 1001 | 226.5 | 392 | 140 | 756 |
| G-330-250    | 2   | 279 | 359 | 580 | 640  | -  | 18 | 344 | 763  | 313 | 959  | -     | 343 | 200 | 681 |
| G-340-250    | 2   | 279 | 359 | 650 | 710  | -  | 18 | 326 | 763  | 313 | 984  | -     | 343 | 200 | 682 |
| G-350-250    | 2   | 318 | 398 | 650 | 710  | -  | 18 | 350 | 783  | 333 | 1049 | -     | 343 | 200 | 707 |
| G-360-250    | 2   | 318 | 398 | 650 | 710  | -  | 18 | 352 | 783  | 333 | 1051 | -     | 329 | 200 | 693 |
| G-360-250(I) | 2   | 318 | 408 | 750 | 810  | -  | 18 | 300 | 798  | 348 | 1049 | -     | 343 | 200 | 707 |
| G-375-250    | 2   | 356 | 456 | 750 | 810  | -  | 24 | 300 | 782  | 332 | 1069 | -     | 329 | 200 | 724 |
| G-375-250(I) | 2   | 356 | 456 | 750 | 810  | -  | 24 | 300 | 782  | 332 | 1060 | -     | 329 | 200 | 724 |
| G-3100-250   | 2   | 362 | 506 | 750 | 810  | -  | 24 | 330 | 807  | 357 | 1152 | -     | 343 | 200 | 873 |
| G-3125-300   | 2   | 540 | 580 | 680 | 1000 | -  | 23 | 316 | 1012 | 492 | 1261 | -     | 230 | 230 | 911 |

經銷商

※本型錄內容如有變更恕不另行通知  
Contents of the catalogue are subject to change without notice