


[外形尺寸] Outline Demension

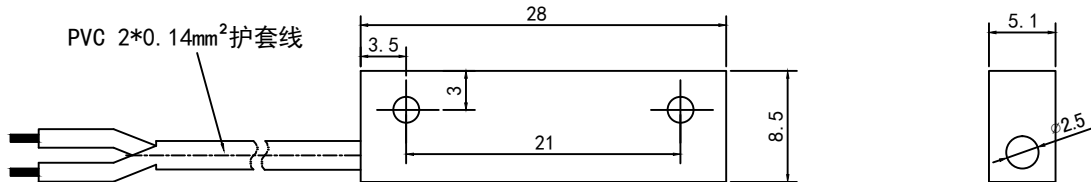

开关参数 Switch Characteristic



|                                 |                    |                                 |
|---------------------------------|--------------------|---------------------------------|
| 1. 干簧管型号 Switching Specifaction | 1: (Normally open) | 2: (Normally open High voltage) |
|                                 | Form A             | Form A (HV)                     |
| 2. 最大接点容量 Max Contact Rating    | 10W                | 10W                             |
| 3. 最大开关电压 Max Switch Voltage    | DC200V             | AC265V/DC200V                   |
| 4. 最小击穿电压 Min Breakdown Voltage | DC250V             | DC400V                          |
| 5. 最大开关电流 Max Switch Current    | 0.5A               | AC0.3A/DC0.4A                   |
| 6. 最大负载电流 Max Carry Current     | 1.0A               | 1.4A                            |

性能参数 Physical Characteristic

|                         |               |
|-------------------------|---------------|
| 1. 耐冲击性 Min Shock:      | 30G           |
| 2. 耐振动性 Min Vibration:  | 30G (10~50Hz) |
| 3. 使用温度范围 Temp. Rating: | -30~80°C      |
| 4. 热冲击性 Heat Shock:     | -40~85°C      |

订购信息 Order Information

| 系列 Series  | 触点形式 Contact Form | 开关参数 Switch Characteristic | 磁性特征 (灵敏度) Magneticial Specifaction (Sensitivity)            | 电线长度 (毫米) Cable Length (mm)      | 剥皮浸锡 Termination                   |
|------------|-------------------|----------------------------|--|----------------------------------|------------------------------------|
| MS24-      | XX                | X                          | X  | X                                | W                                  |
| 选项 OPTIONS | 1A: 1Form A       | 1: 10W<br>2: 10W (HV)      | 1: 10AT-15AT<br>2: 15AT-20AT<br>3: 20AT-25AT<br>4: 25AT-30AT | 1: 100mm<br>2: 300mm<br>3: 500mm | W: 5mm of wire stripped and tinned |

|                               |                |               |          |                       |   |
|-------------------------------|----------------|---------------|----------|-----------------------|---|
| 备注 Remark:<br><br><b>RoHS</b> | 设计 Designed by | zhangxiaojing | 品名 TITLE | 接近开关 Proximity Switch |   |
|                               | 审查 Checked by  | Xu Deng Kui   | 产品型号 P/N |                       |   |
|                               | 批准 Approved by | Xu Tao        | MS24     | 版本 Version: V1.0      |   |
|                               | 日期 Date        | 2013.05.29    |          | 页次 Page: 1/1          |   |