

HVR12-1A10-04



- High Voltage Reed Relay
- Coil Voltage 12V
- Breakdown up to 10KV

Misensor Tech (Shanghai) Co., Ltd
 Add: No. 25 Hangming Road Hangtoun Town,
 Pudong new district, Shanghai
 TEL: 021- 60976200 FAX: 021-60976212
 Http://www.Misensor.cn
 E-mail: Postmaster@misensing.com

[Outline Dimension]


Unit: mm

Scale: 1/1

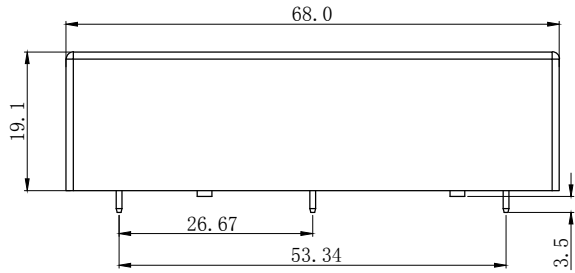

[Pin Layout]

[Top View]

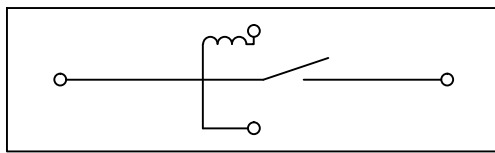

Order Information

HVR12-1A10-04

Coil Parameters		Relay Parameters	
1 Nominal coil voltage	12 VDC	1 Min Breakdown Voltage	10K VDC
2 Max Operating voltage	16 VDC	2 Dielectric Strength coil/contact	15K VDC
3 Max Pull-in voltage	9 VDC	3 Insulation Resistance coil/contact	1.00E+12ohm
4 Min Drop-out voltage	1 VDC	4 Operate Time, incl. Bounce	3.0ms
5 Coil Resistance	200ohm	5 Reset Time	1.5ms
Contact Parameters		6 Capacitance Across Contacts	0.8pF
1 Max Contact Rating	50 W	7 Storage Temperature	-35~+105°C
2 Max Switch Voltage	7.5K VDC	8 Operating Temperature	-20~+70 °C
3 Max Switch Current	3.0 A	9 Soldering Temperature	5 sec. max 260°C
4 Max Carrying Current	5.0 A		
5 Min Breakdown Voltage	10K VDC		
6 Max Contact Resistance	150 mohm		

Version: 01	Designed by		TITLE	
	Checked by		High Voltage Reed Relay	
	Approved by		P/N	Scale: 1:1
	Date	5th, Oct, 2010	HVR12-1A10-04	Page: 1/1